



HOMOGENEOUS FLOORING
STRENGTHEN POLYURETHANE SHEET



ANTI SKIDDING AND ANTIFOULING
ENVIRONMENTAL PROTECTION
ANTISEPTIC ERASUR

- Hospitals
- Airports
- Laboratories
- Libraries
- Offices
- Schools




HOMOGENEOUS

strengthen polyurethane floor



GARANTI
YER KAPLAMALARI


HOMOGENEOUS FLOORING STRENGTHEN POLYURETHANE SHEET

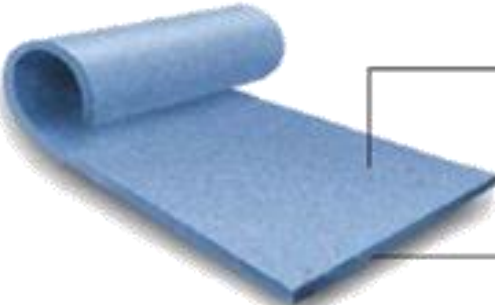

PUR special maintenance treatment. Excellent scratch resistance and anti iodine and other pollution, and no need to wax.

Compacted Homogeneous flooring

- High performance flexible homogenous multipurpose flooring
- UV special maintenance treatment: Easy of maintenance
- Densely compacted surface for improved wear and ease of maintenance
- Incorporates a bacteriosatic and fungistic property
- Antistatic

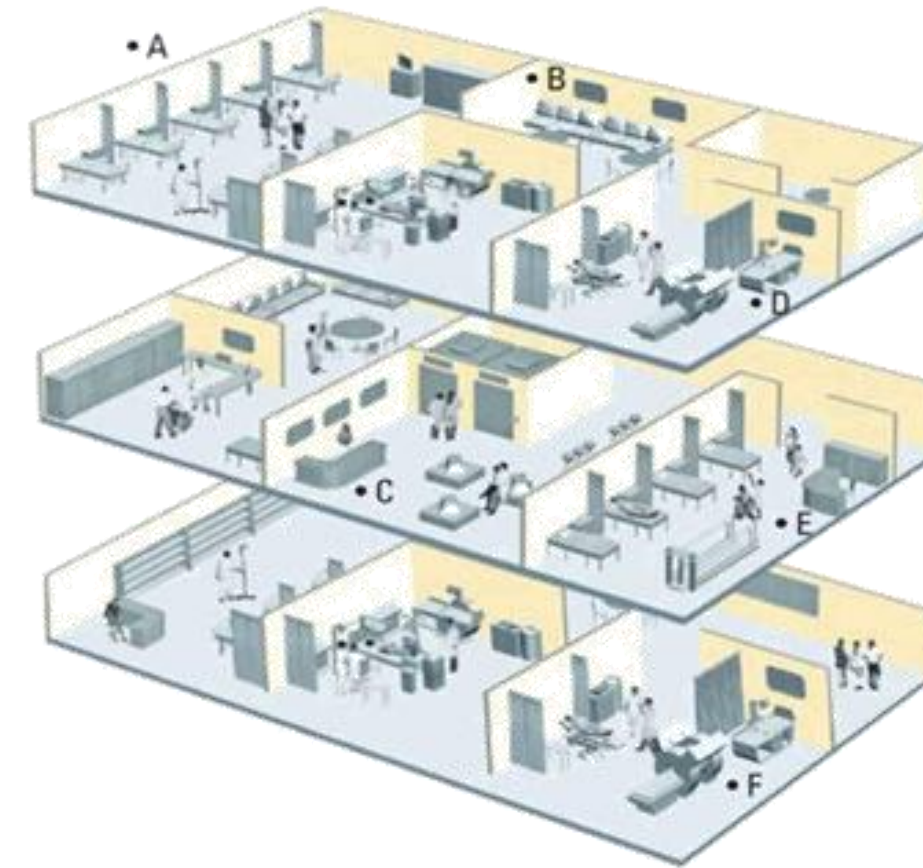

Product Recommendations

Hospitals today provide a space relative to the comfort convenience of one's home. Therefore, it is necessary to select floor materials that represent specific designs that are equipped with various functions.

• A | Patient Room



• B | Entrance, Lobby



• C | Corridor, Hall



• D | Physical Therapy Areas



• E | Emergency Room



• F | Operating Room



1 LOTUS EFFECT

If lotus leaves are like water beads, reduce surface tension, so that waterborne stains are difficult to remain and penetrate.

2 OPTIDUR NC

If the gem is hard and transparent, add high strength and wear resistant special ingredients, so that there is no trace of damage and scratch.

















3 DOUBLY DURABLE

The product surface protection system, which is 2 times the average thickness of competing products, gives the ground more durability.

















4 HEEL RESISTANCE

synergistic effect makes shoe heel imprint and other stubborn stains more difficult to adhere to, and is easy to clean.

Non-Directional

Characteristics	Standard	Unit	Result
Type of flooring	ISO 10581 - EN 649		Homogeneous Sheet
Material			Polyvinyl chloride
Cover			Strengthen PUR
Safety criteria			
Flammability 	GB 8624 - 2012	class	B _{fl} - s1
Sound 	ISO 10140	dB	3
Slip resistance 	DIN 51130	group	R9
Dynamic coefficient of friction	EN 13893	class	DS
Performance behaviour			
Sheet width 	ISO 24341 - EN 426	m	2
Sheet length 	ISO 24341 - EN 426	m	20
Overall thickness 	ISO 243416 - EN 428	mm	2.0
Total weight 	ISO 23997 - EN 430	kg/m ²	2.8
Wear resistance 	EN 649	group	T
Residual indentation 	ISO 24343 -1 - EN 433	mm	0.02
Dimensional stability 	ISO 23999 - EN 434	-	X<0.4%, Y<0.4%
Color fastness 	ISO 105 - B02	rating	≥6
Resistance to staining	EN 423		No stain
Bend resistance	GB/T 11982.2 - 2015		No
Antibacterial 	ISO 22196		Level 1
Anti iodine			Good
Classification			
Domestic	ISO 10874 - EN 685	class	23 heavy duty
Commercial	ISO 10874 - EN 685	class	34 very heavy duty
Industrial	ISO 10874 - EN 685	class	43 heavy duty
Additional property			
Castor Chair  ✓		Antistatic Behaviour  ✓	
Underfloor Heating  ✓		Chemical Resistance  ✓	


Directional

Characteristics	Standard	Unit	Result
Type of flooring	ISO 10581 - EN 649		Homogeneous Sheet
Material			Polyvinyl chloride
Cover			Strengthen PUR
Safety criteria			
Flammability 	GB 8624 - 2012	class	B _{fl} - s1
Sound 	ISO 10140	dB	3
Slip resistance 	DIN 51130	group	R9
Dynamic coefficient of friction	EN 13893	class	DS
Performance behaviour			
Sheet width 	ISO 24341 - EN 426	m	2
Sheet length 	ISO 24341 - EN 426	m	20
Overall thickness 	ISO 243416 - EN 428	mm	2.0
Total weight 	ISO 23997 - EN 430	kg/m ²	3.0
Wear resistance 	EN 649	group	P
Residual indentation 	ISO 24343 -1 - EN 433	mm	0.02
Dimensional stability 	ISO 23999 - EN 434	-	X<0.4%, Y<0.4%
Color fastness 	ISO 105 - B02	rating	≥6
Resistance to staining	EN 423		No stain
Bend resistance	GB/T 11982.2 - 2015		No
Antibacterial 	ISO 22196		Level 1
Anti iodine			Good
Classification			
Domestic	ISO 10874 - EN 685	class	23 heavy duty
Commercial	ISO 10874 - EN 685	class	34 very heavy duty
Industrial	ISO 10874 - EN 685	class	43 heavy duty
Additional property			
Castor Chair  ✓		Antistatic Behaviour  ✓	
Underfloor Heating  ✓		Chemical Resistance  ✓	


Perseus

Strengthen ployurethane homogeneous floor


Dimension:2.0mm(T)x2.0m(W)x20m(L)

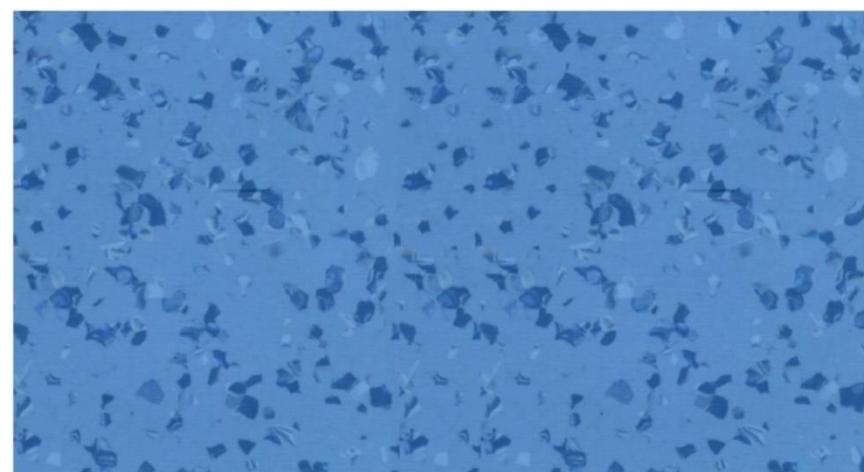


© WL310 5366

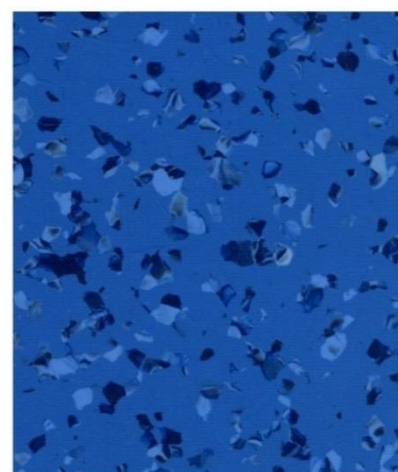


© WL310 5356

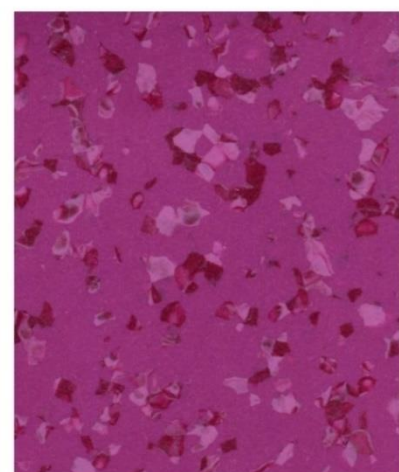


© WL310 5368

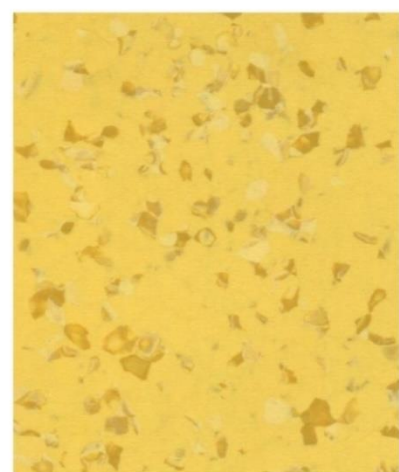

© WL310 5322

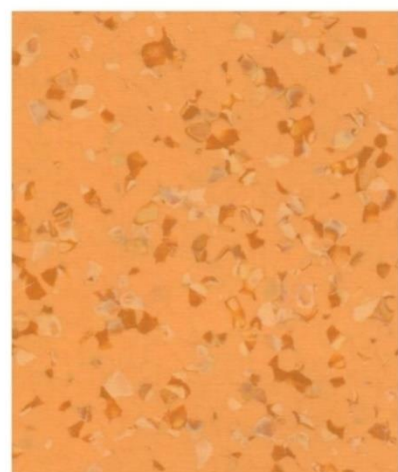


© WL310 5385

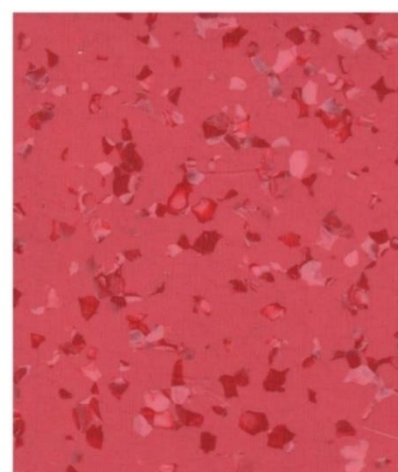


© WL310 5375




© WL310 5332

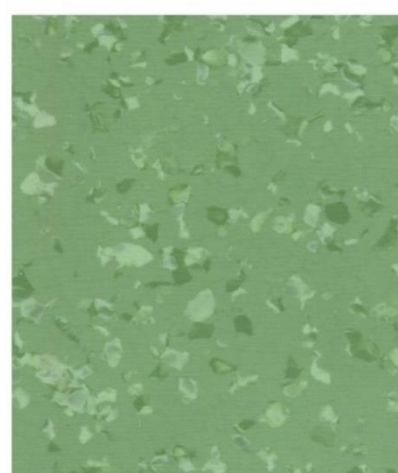


© WL310 5347

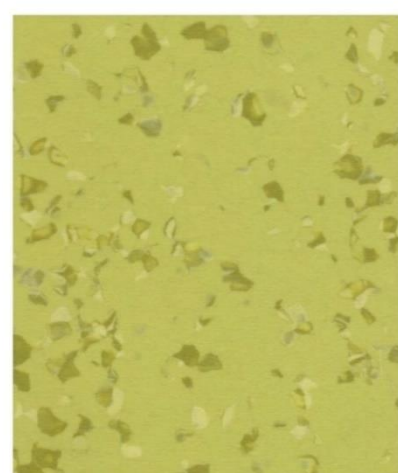


© WL310 5357

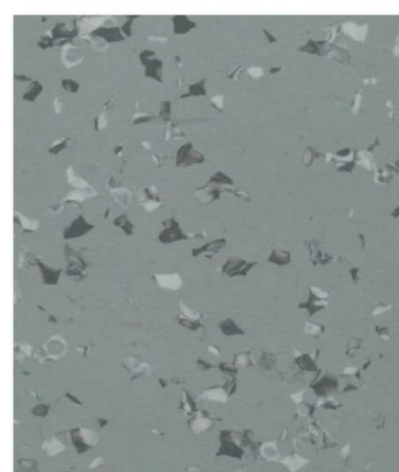

© WL310 5330

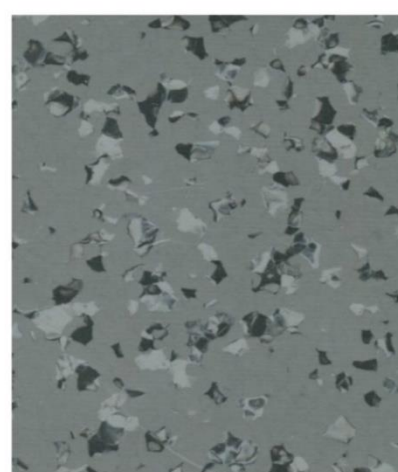

© WL310 5350

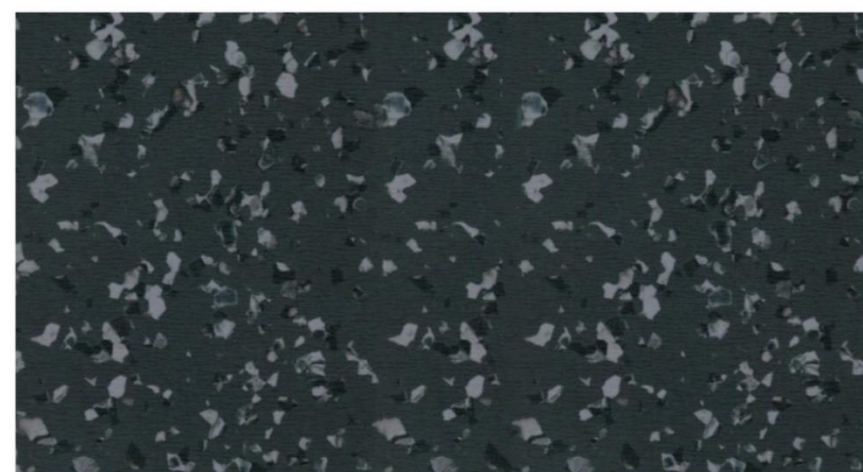


© WL310 5360


Perseus

Strengthen ployurethane homogeneous floor

Dimension:2.0mm(T)x2.0m(W)x20m(L)

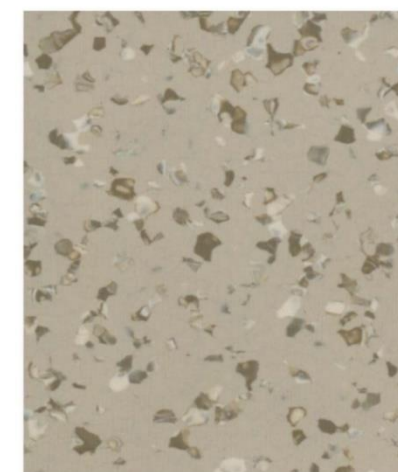


© WL310 5354

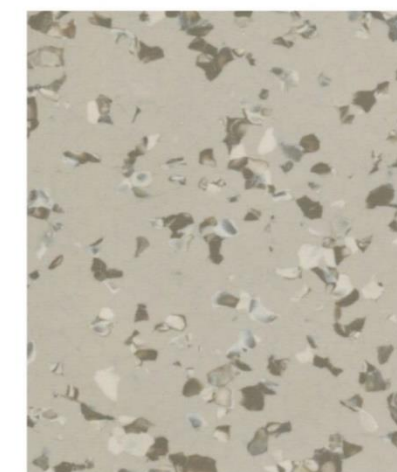

© WL310 5341



© WL310 5363

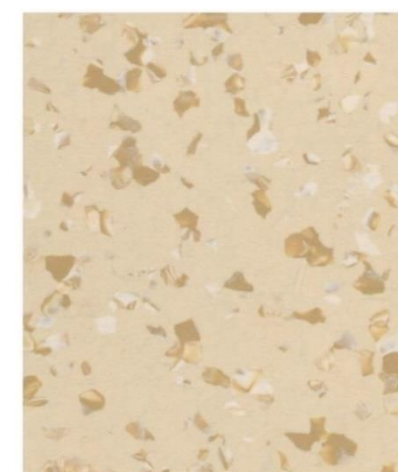


© WL310 5324



© WL310 5305




© WL310 5303

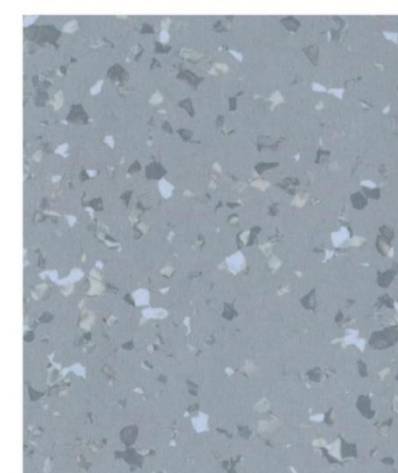


© WL310 5320




© WL310 5329

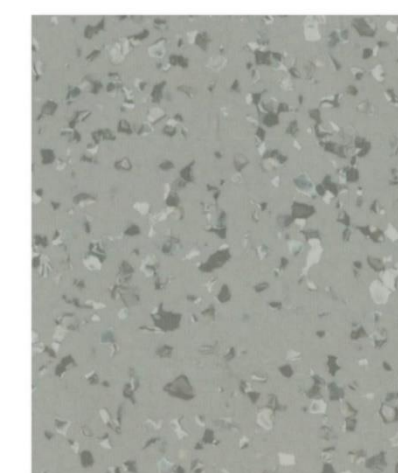

© WL310 5340

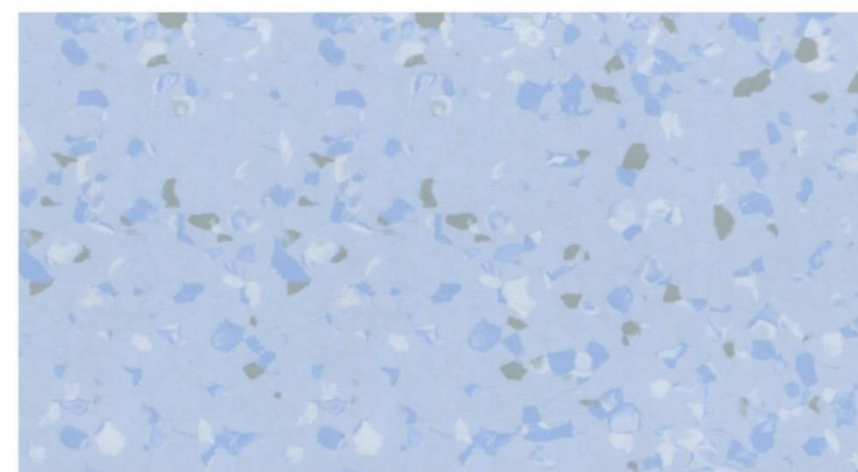

© WL310 5306

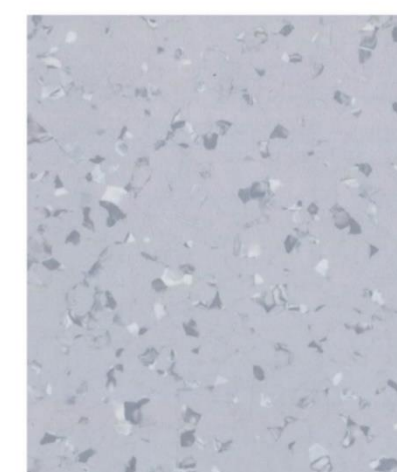

© WL310 5310




© WL310 5312

Taurus

Strengthen ployurethane homogeneous floor
Dimension:2.0mm(T)x2.0m(W)x20m(L)



© WL320 6355

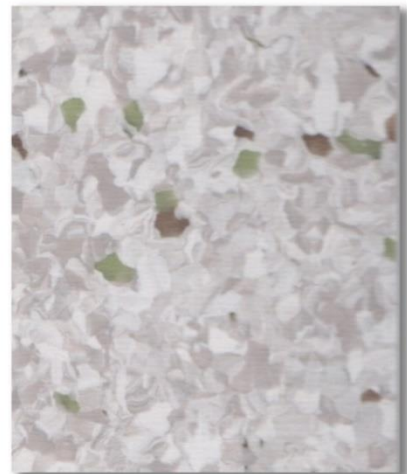

© WL320 6358



© WL320 6354



© WL320 6352



© WL320 6362



© WL320 6361



© WL320 6353



© WL320 6377



© WL320 6360



© WL320 6357



© WL320 6384



© WL320 6378



© WL320 6373

Taurus


Strengthen ployurethane homogeneous floor
Dimension:2.0mm(T)x2.0m(W)x20m(L)




© WL320 6379



© WL320 6359

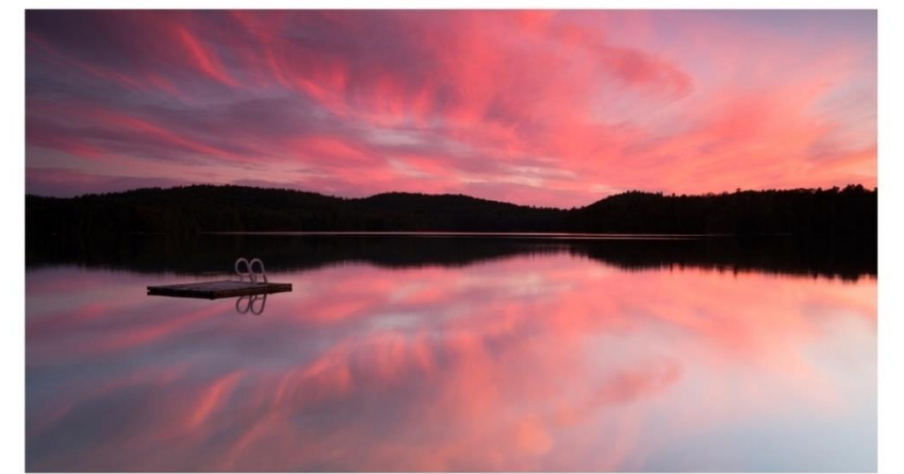

© WL320 6372

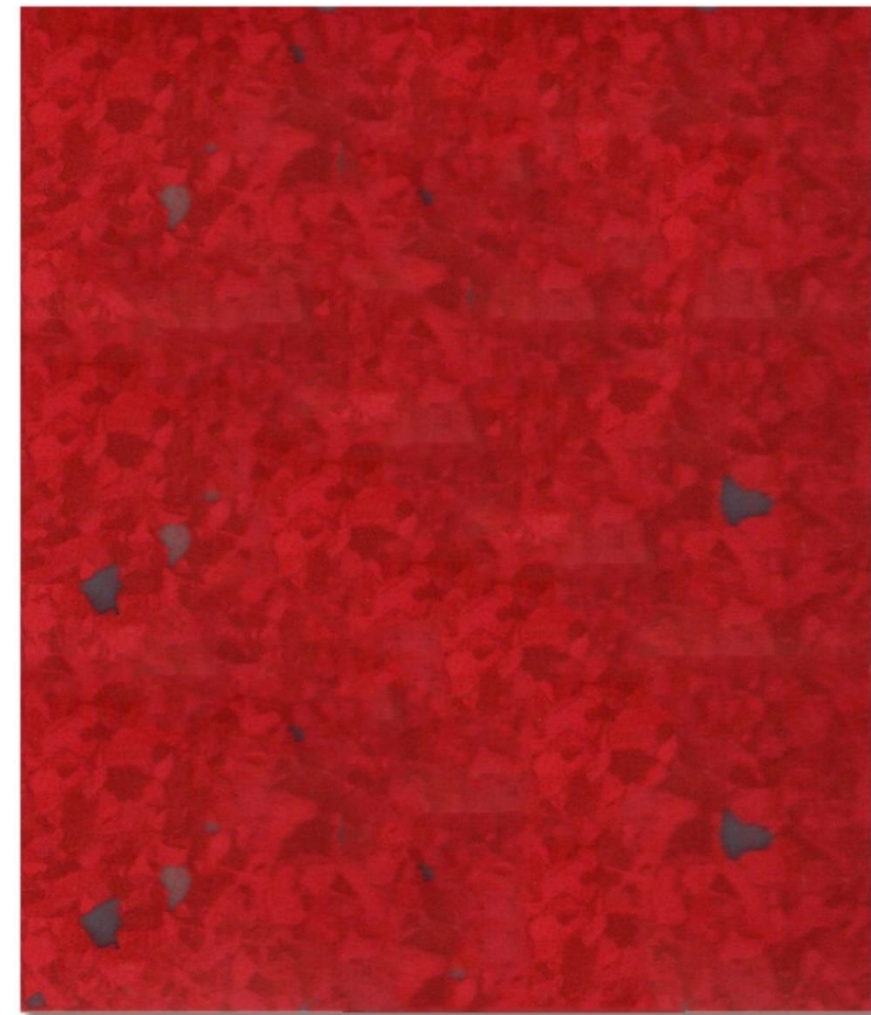


© WL320 6371



© WL320 6383




© WL320 6380

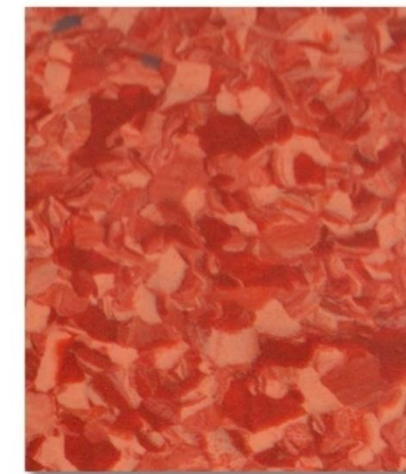


© WL320 6374




© WL320 6372

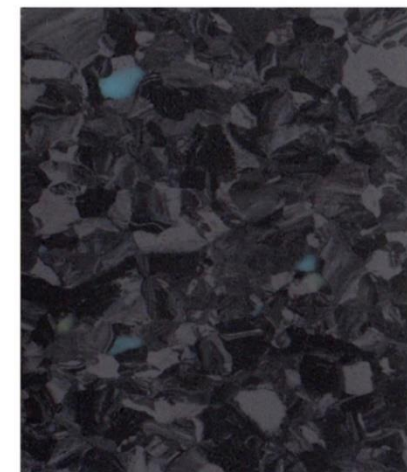

© WL320 6350

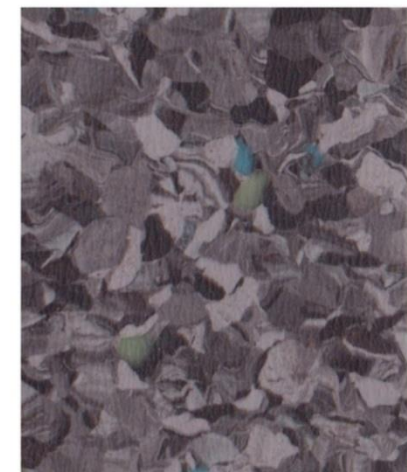

© WL320 6356

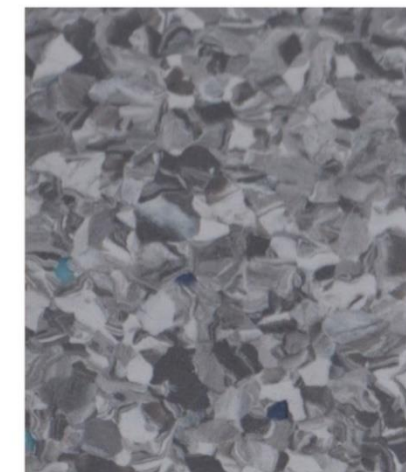

© WL320 6351




© WL320 6376

Taurus

Strengthen ployurethane homogeneous floor

Dimension:2.0mm(T)x2.0m(W)x20m(L)

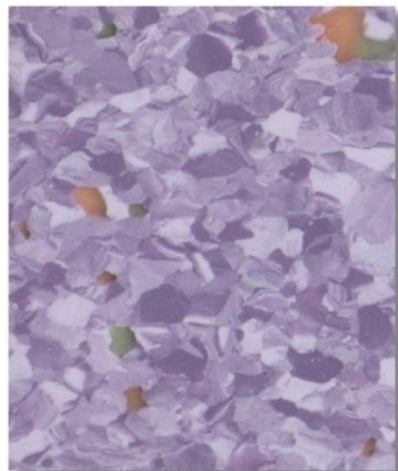


© WL320 6375



© WL320 6369



© WL320 6381

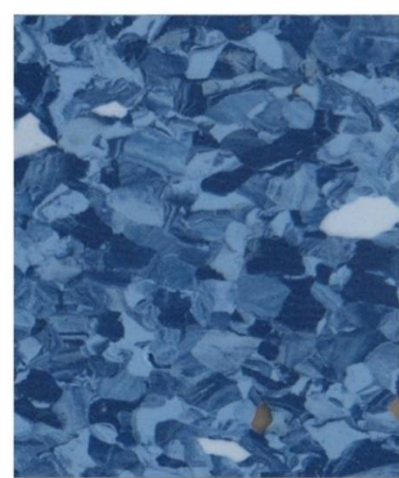

© WL320 6367



© WL320 6368



© WL320 6382



© WL320 6370



© WL320 6363



© WL320 6366



© WL320 6365



© WL320 6364

Cetus

Strengthen ployurethane homogeneous floor


Dimension:2.0mm(T)x2.0m(W)x20m(L)



© WL330 9032



© WL330 9027

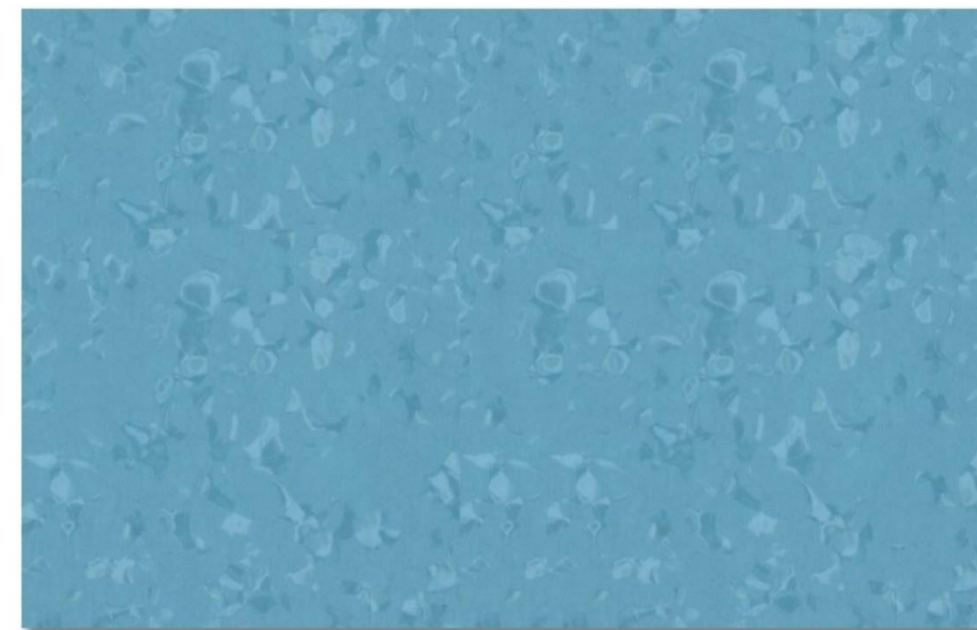

© WL330 9037



Strengthen polyurethane homogeneous floor
 Dimension:2.0mm(T)x2.0m(W)x20m(L)



Strengthen polyurethane homogeneous floor
 Dimension:2.0mm(T)x2.0m(W)x20m(L)



© WL330 9001



© WL330 9003



© WL330 9004



© WL330 9031




© WL330 9041



© WL330 9034




© WL330 9008

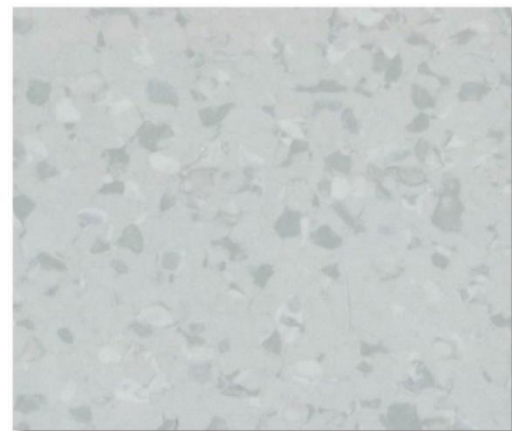


© WL330 9009




© WL330 9010

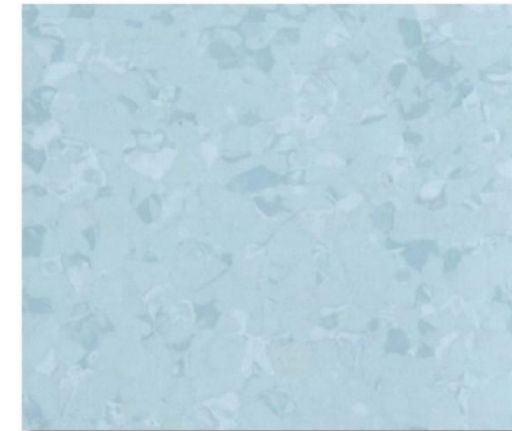


© WL330 9006

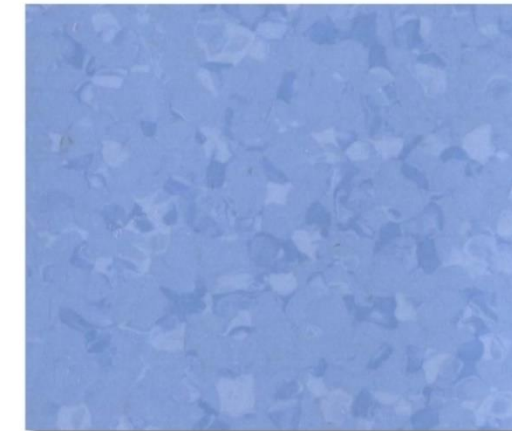


© WL330 9016

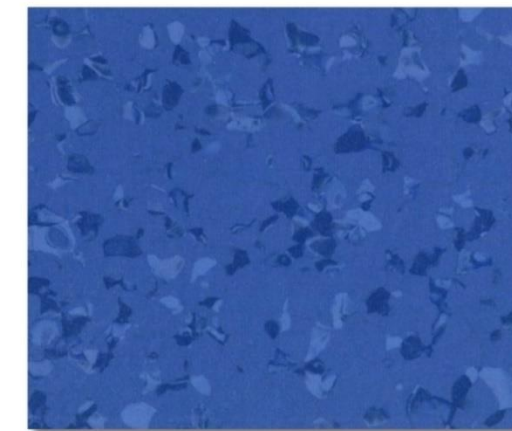


© WL330 9046

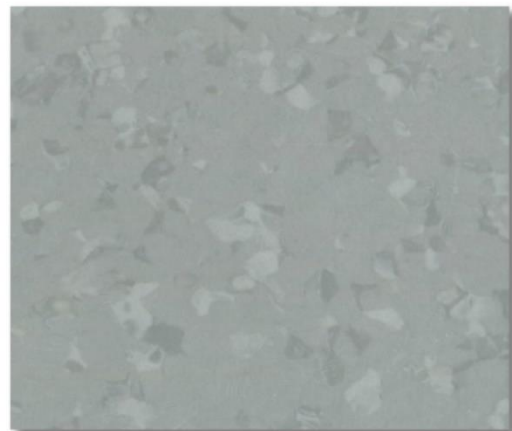


© WL330 9029

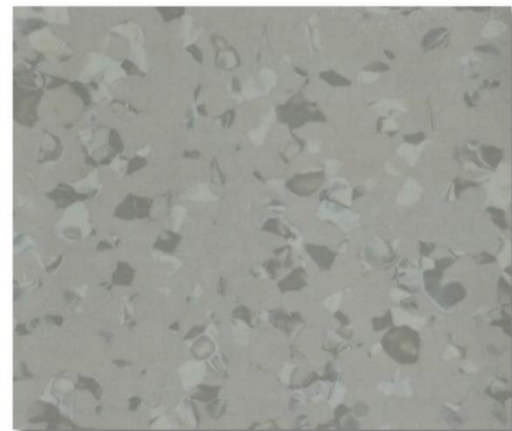


© WL330 9039

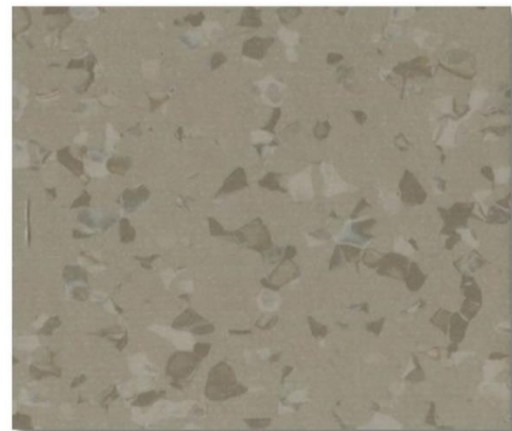


© WL330 9043

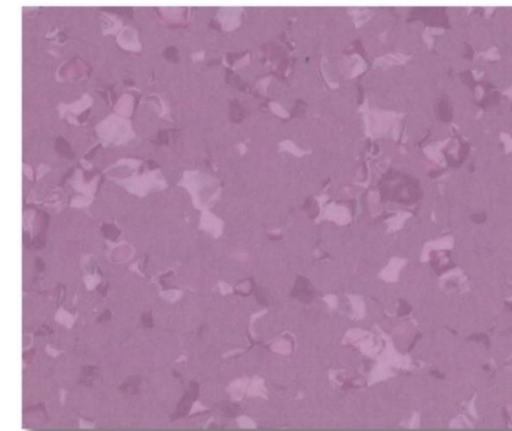


© WL330 9048

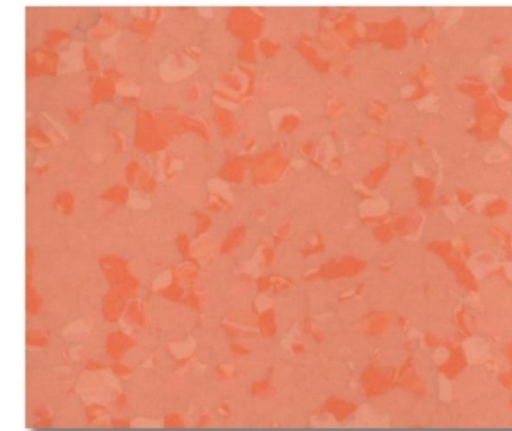


© WL330 9035

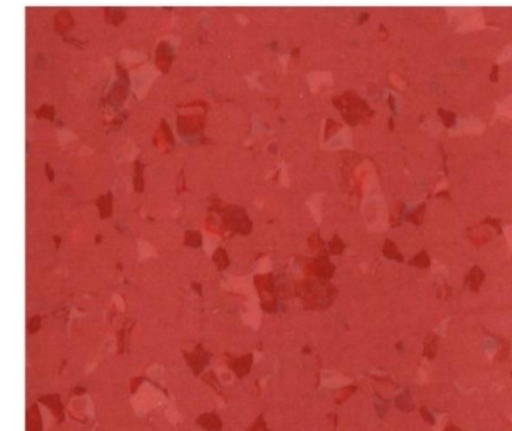


© WL330 9055

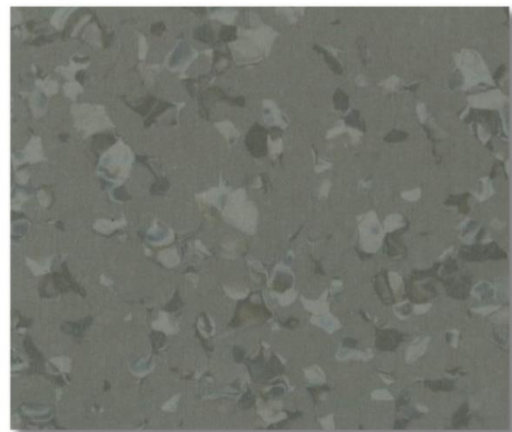

© WL330 9044

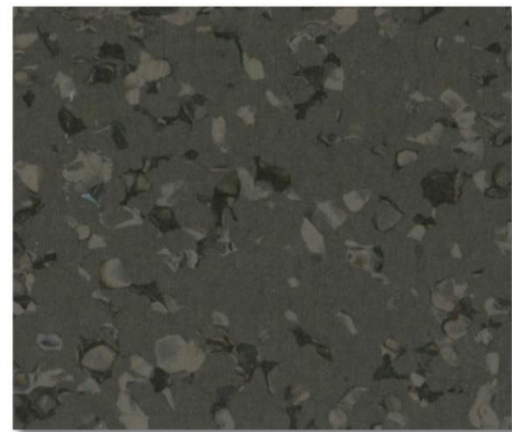


© WL330 9045

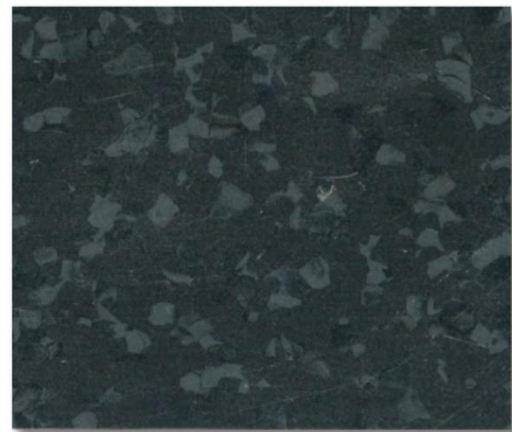

© WL330 9059



© WL330 9007

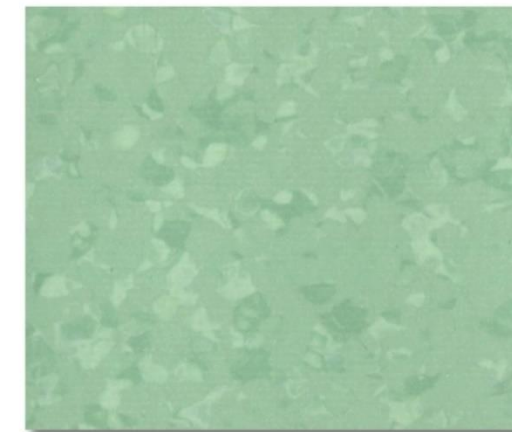


© WL330 9017

Draco

Strengthen ployurethane homogeneous floor


Dimension:2.0mm(T)x2.0m(W)x20m(L)

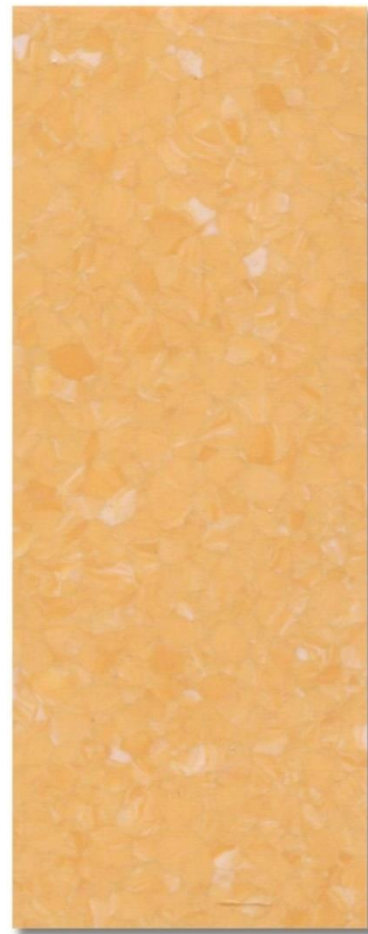


@ WL410 306



@ WL410 307

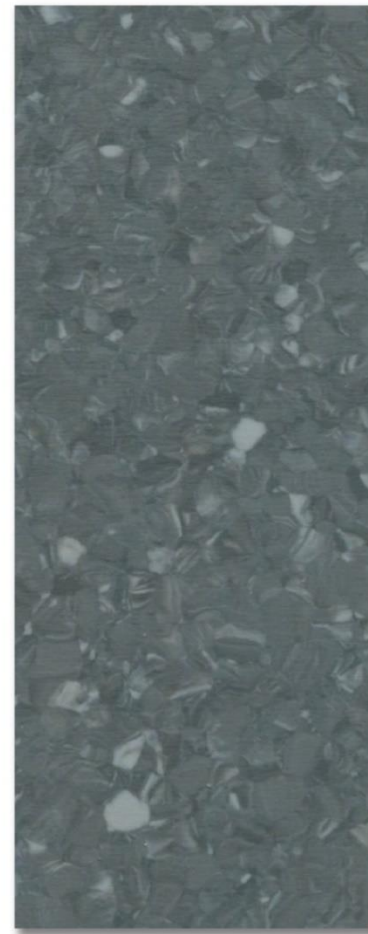

@ WL410 022

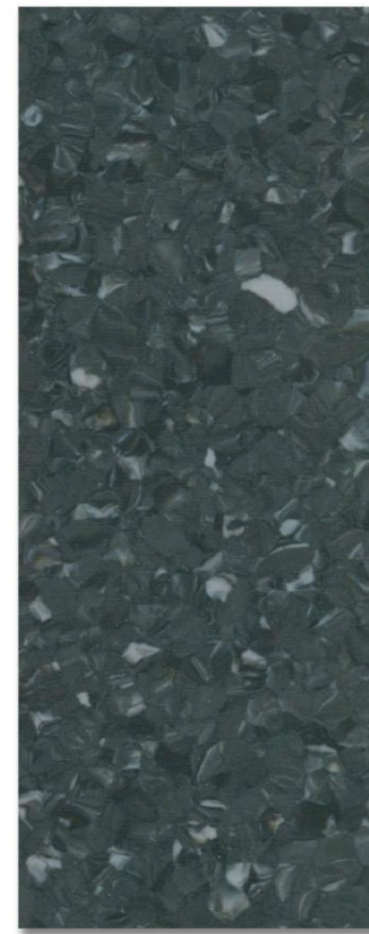


@ WL410 015


Draco

Strengthen ployurethane homogeneous floor

Dimension:2.0mm(T)x2.0m(W)x20m(L)

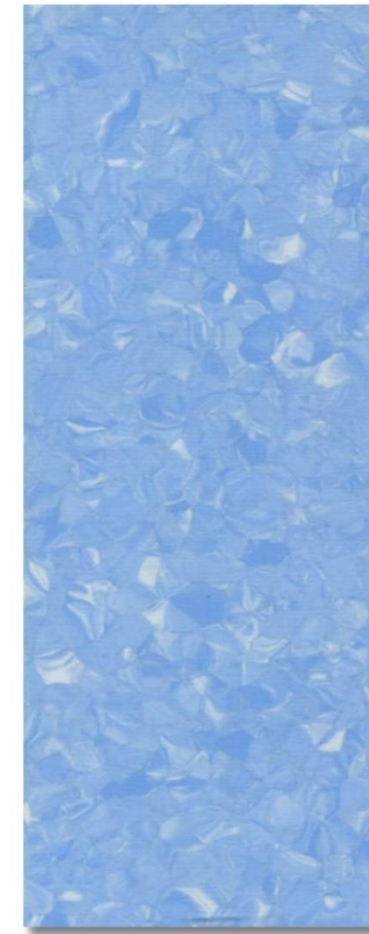

@ WL410 602

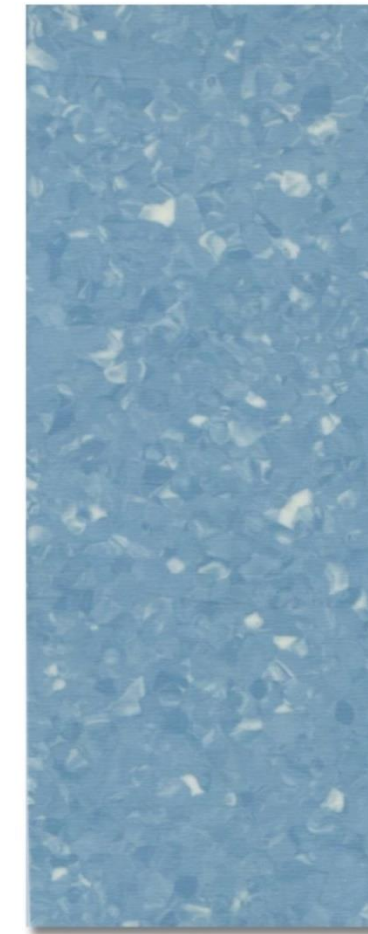


@ WL410 601



@ WL410 502




@ WL410 501

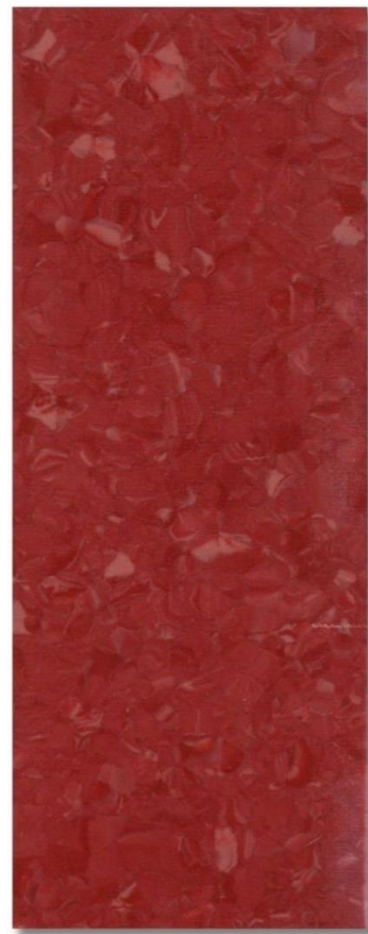

@ WL410 416



@ WL410 614

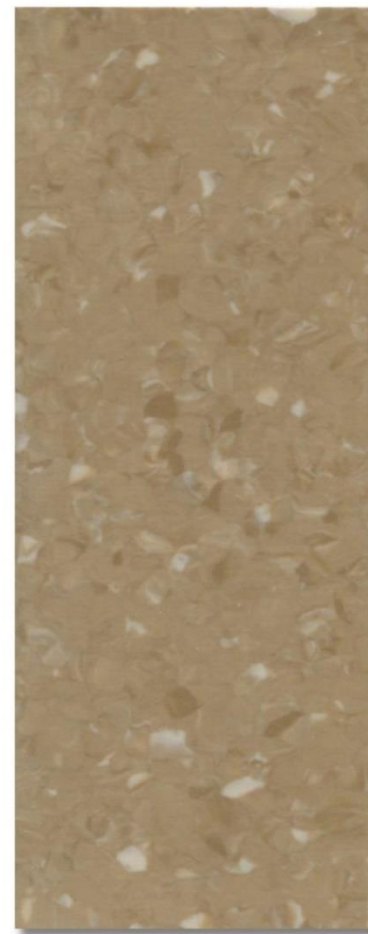

@ WL410 119



@ WL410 120



@ WL410 101



@ WL410 201



@ WL410 001



@ WL410 002



Strengthen ployurethane homogeneous floor
 Dimension:2.0mm(T)x2.0m(W)x20m(L)



@ WL420 208



@ WL420 104



@ WL420 121



@ WL420 122



@ WL420 237



@ WL420 034




@ WL420 035



@ WL420 012




@ WL420 325

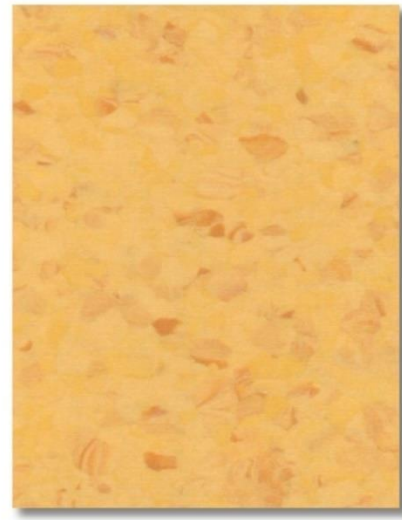

@ WL420 336



@ WL420 423

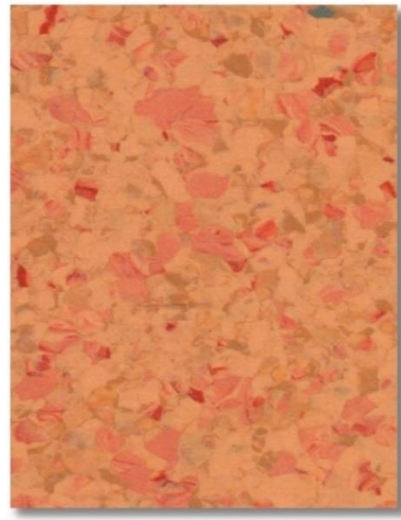

@ WL420 430



Strengthen ployurethane homogeneous floor
 Dimension:2.0mm(T)x2.0m(W)x20m(L)



@ WL420 613



@ WL420 609



@ WL420 506




@ WL420 515




@ WL420 531




@ WL420 011

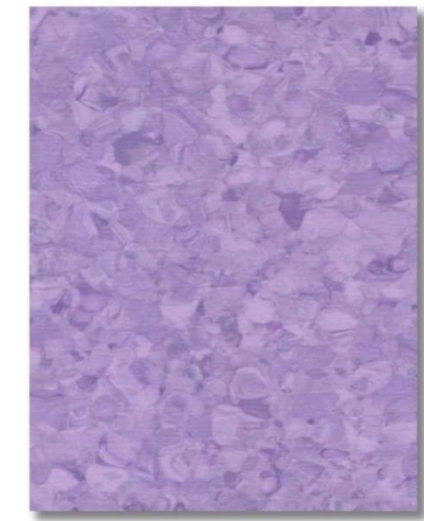

@ WL420 733

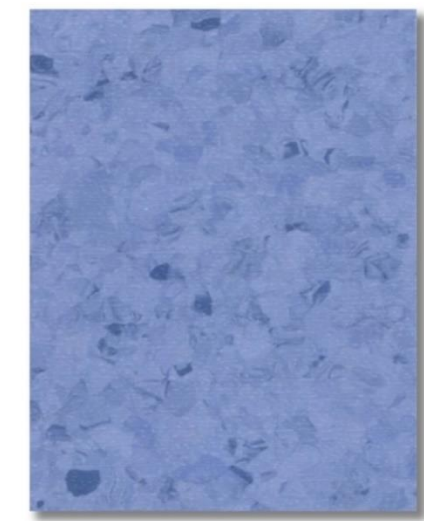

@ WL420 623

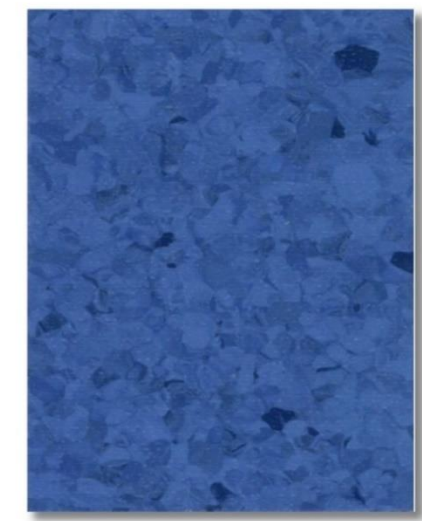

@ WL420 632




@ WL420 317



@ WL420 319



@ WL420 438

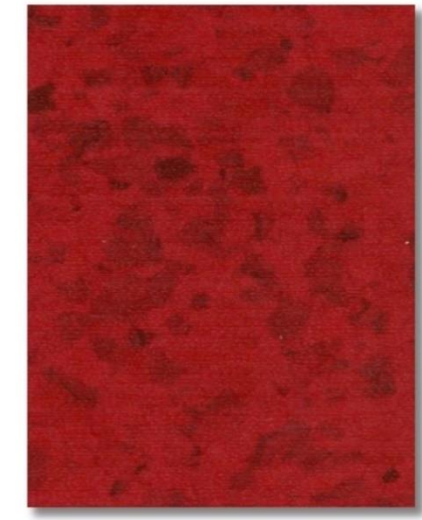

@ WL420 414



Strengthen ployurethane homogeneous floor
 Dimension:2.0mm(T)x2.0m(W)x20m(L)



© WL440 6601



© WL440 6602



© WL440 6603



© WL440 6605



© WL440 6606



© WL440 6607



© WL440 6608



© WL440 6609



© WL440 6610




© WL440 6611



© WL440 6612




© WL440 6613

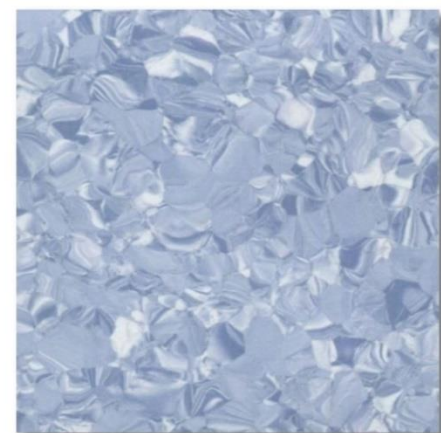

© WL440 6615




© WL440 6616

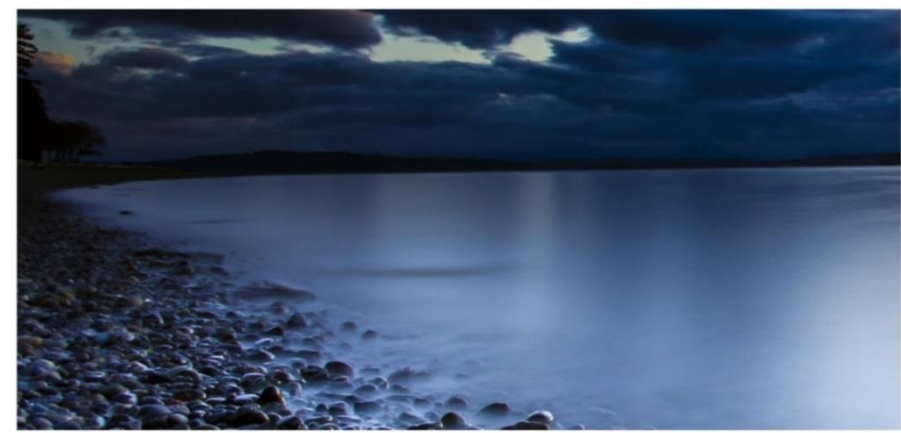


Strengthen ployurethane homogeneous floor
 Dimension:2.0mm(T)x2.0m(W)x20m(L)



© WL440 6617

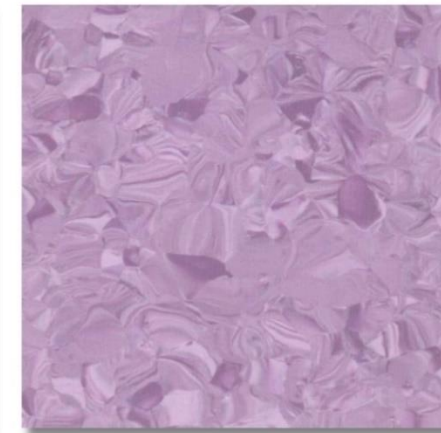

© WL440 6618

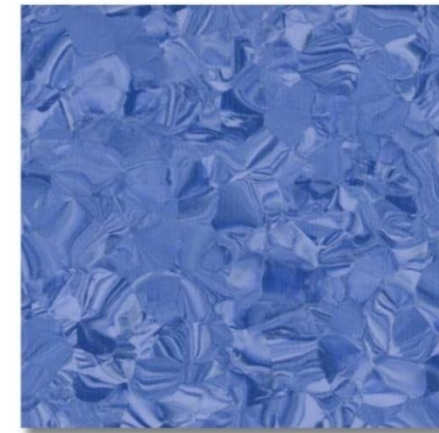


© WL440 6619



© WL440 6620



© WL440 6621

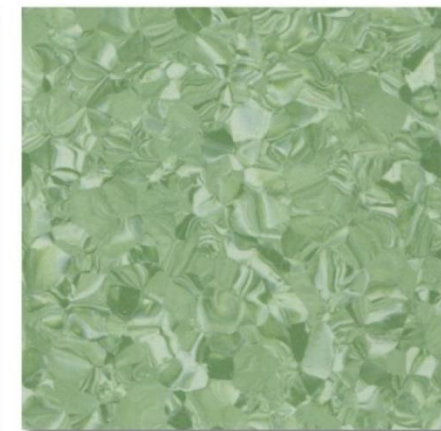


© WL440 6622



© WL440 6623



© WL440 6625

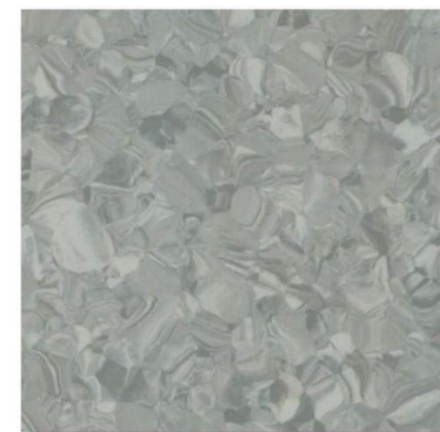

© WL440 6626



© WL440 6627



© WL440 6628



© WL440 6629



© WL440 6630

Scorpius

Strengthen ployurethane homogeneous floor
Dimension:2.0mm(T)x2.0m(W)x20m(L)



@ WL460 6501



@ WL460 6510



@ WL460 6526



@ WL460 6502




@ WL460 6512



@ WL460 6563



@ WL460 6506

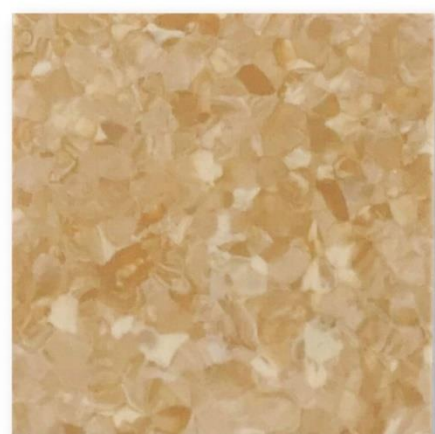


@ WL460 6515




@ WL460 6513




@ WL460 6509

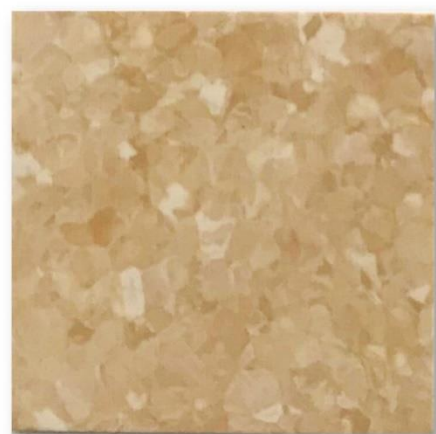

@ WL460 6511

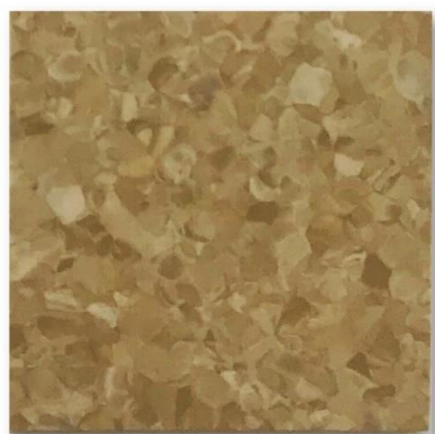

@ WL460 6517

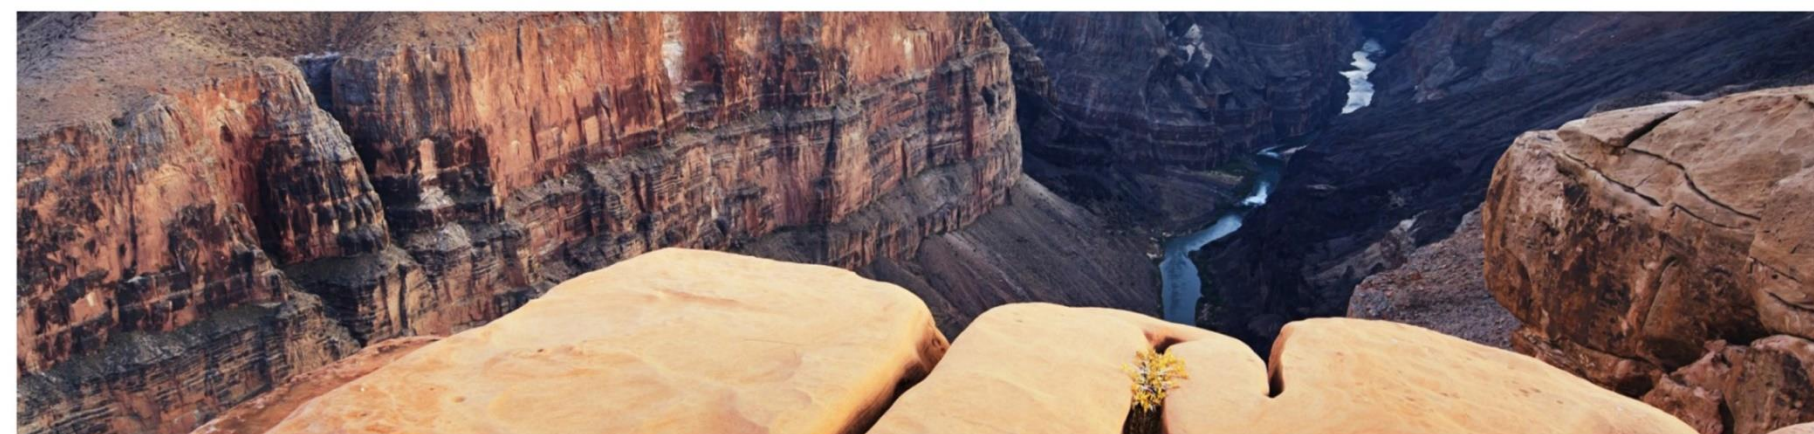


Scorpius

Strengthen ployurethane homogeneous floor
Dimension:2.0mm(T)x2.0m(W)x20m(L)




@ WL460 6505

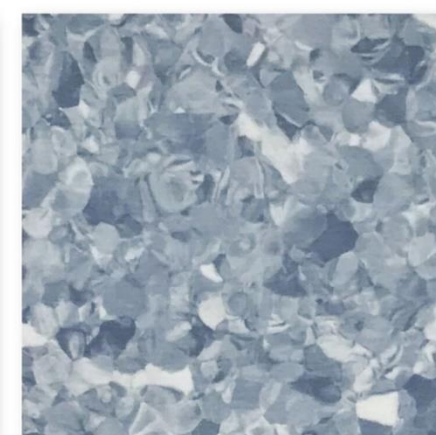

@ WL460 6516



@ WL460 6507

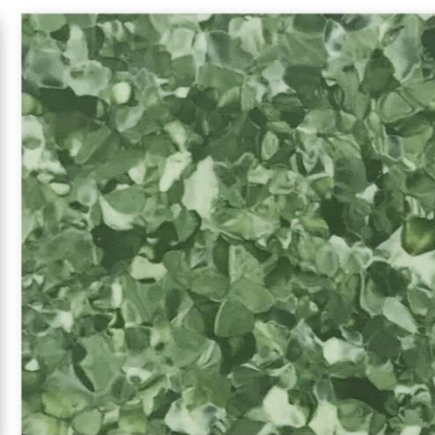

@ WL460 6508




@ WL460 6567




@ WL460 6518



@ WL460 6519

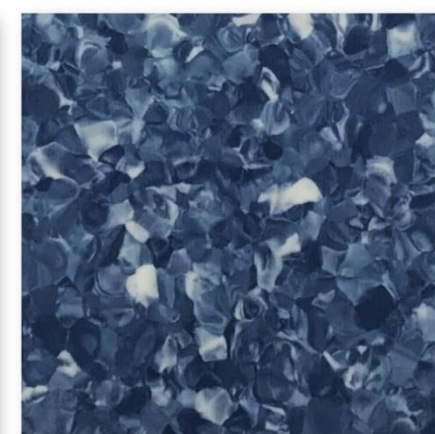

@ WL460 6521

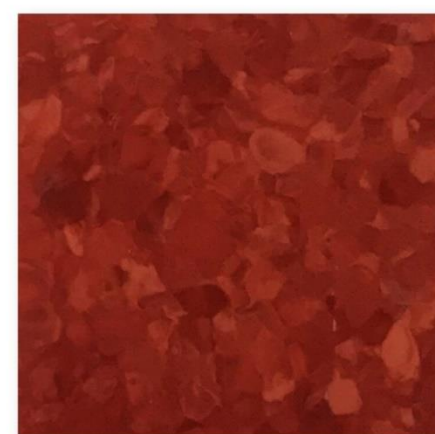


@ WL460 6565



@ WL460 6562



@ WL460 6503

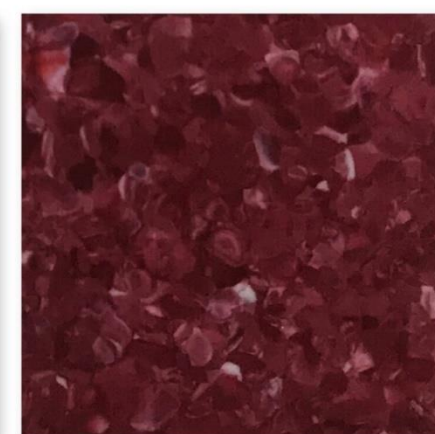

@ WL460 6520





Strengthen ployurethane homogeneous floor

Dimension:2.0mm(T)x2.0m(W)x20m(L)



© WL430 8675



© WL430 8672



© WL430 8657



© WL430 8658




© WL430 8678



© WL430 8676



© WL430 8659

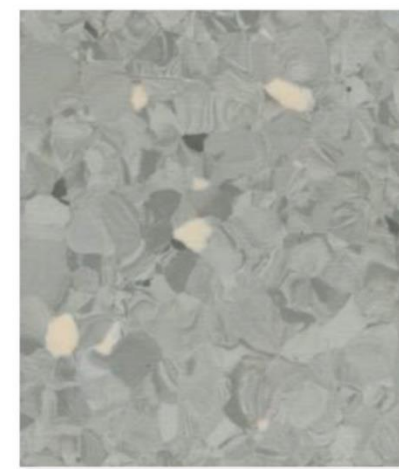


© WL430 8683



© WL430 8673



© WL430 8656

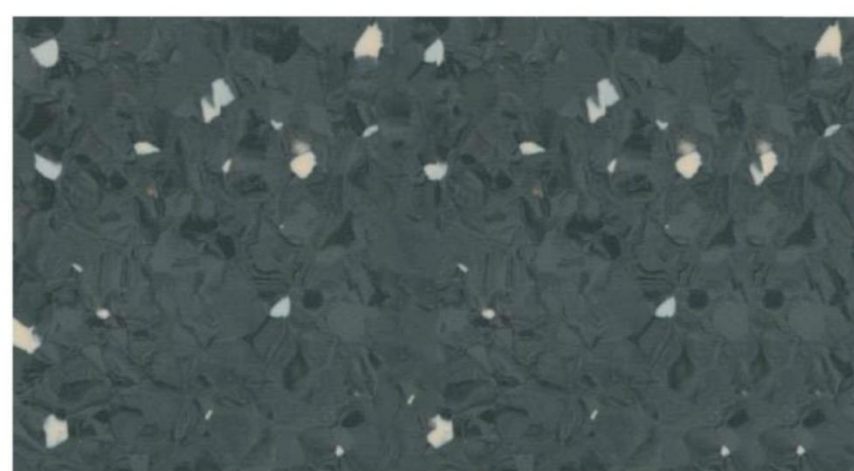

© WL430 8674




© WL430 8654



Strengthen ployurethane homogeneous floor


Dimension:2.0mm(T)x2.0m(W)x20m(L)

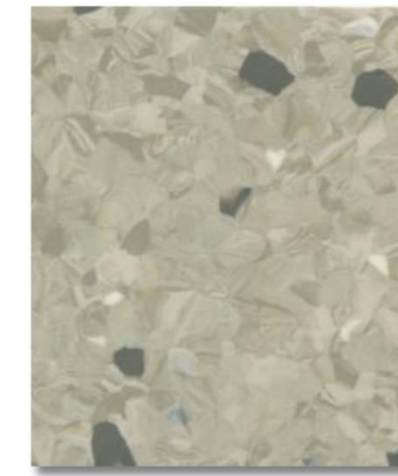

© WL430 8684



© WL430 8685

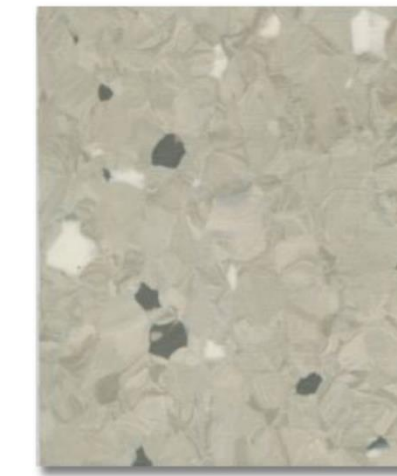


© WL430 8655



© WL430 8686



© WL430 8661

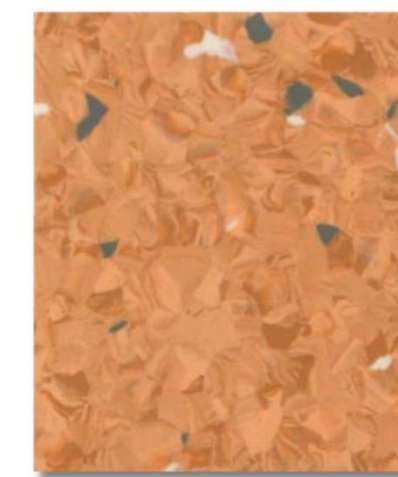

© WL430 8687



© WL430 8660




© WL430 8662




© WL430 8642



© WL430 8643

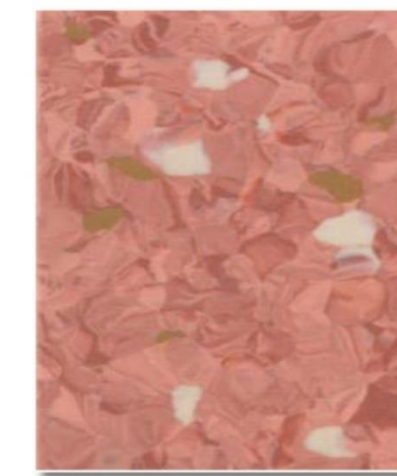

© WL430 8644

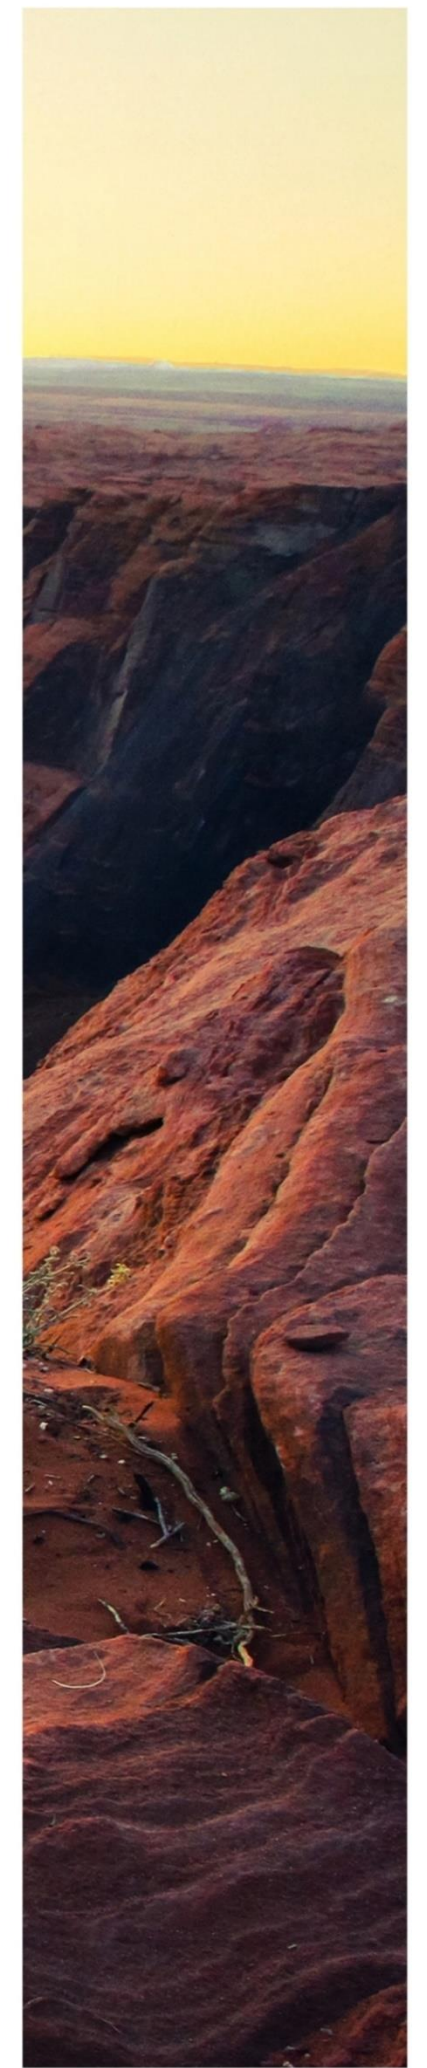

Aries


Strengthen polyurethane homogeneous floor
Dimension: 2.0mm(T)x2.0m(W)x20m(L)



© WL430 8651



© WL430 8670

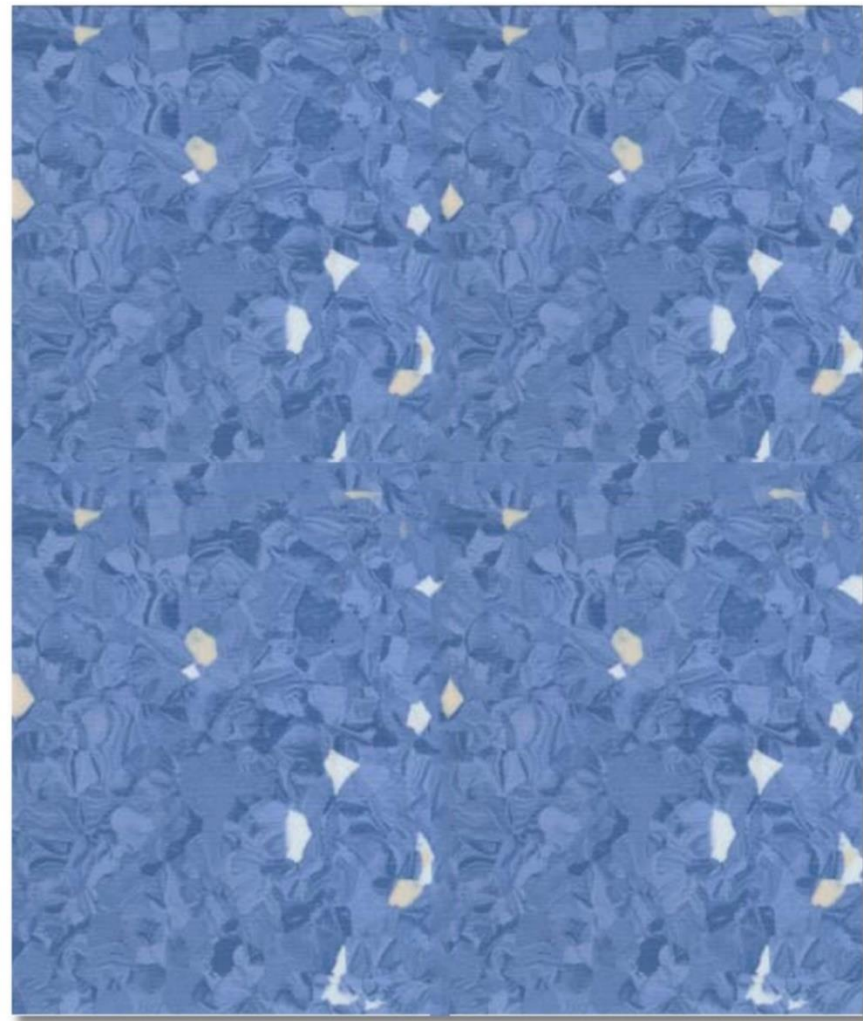

© WL430 8665




© WL430 8652



© WL430 8671



© WL430 8688

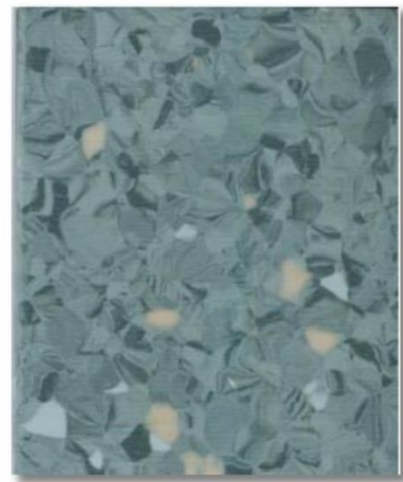

© WL430 8690



© WL430 8682



© WL430 8666



© WL430 8689



© WL430 8679




© WL430 8680




© WL430 8681



Size:2.0mm(T)x2.0m(W)x20m(L)

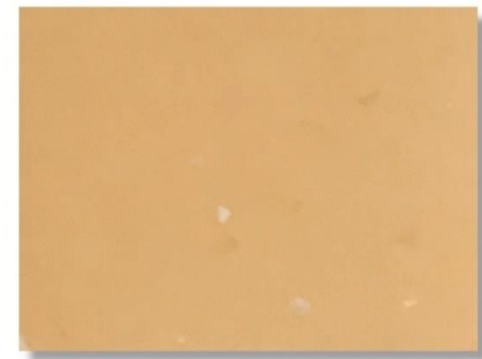


WL-18001

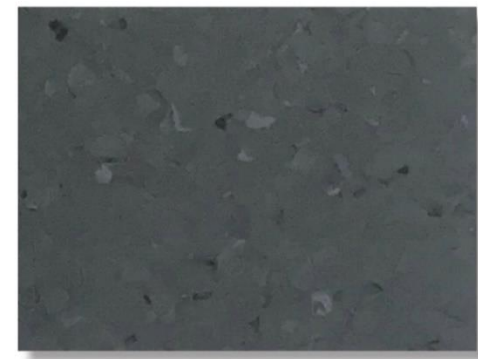


WL-18003



WL-18004

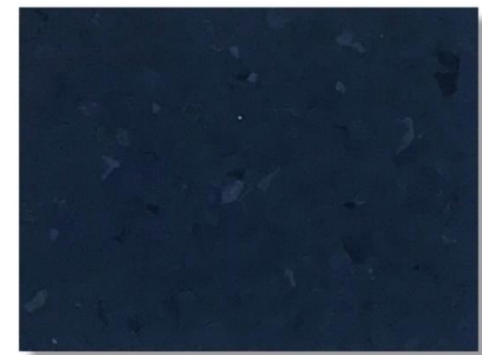


WL-18006

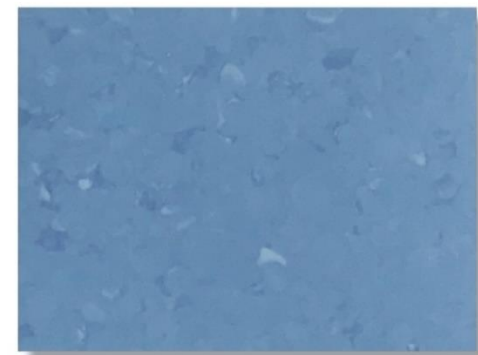

WL-18009




WL-18010

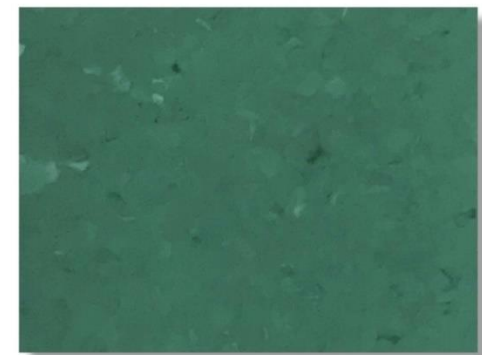


WL-18011




WL-18013

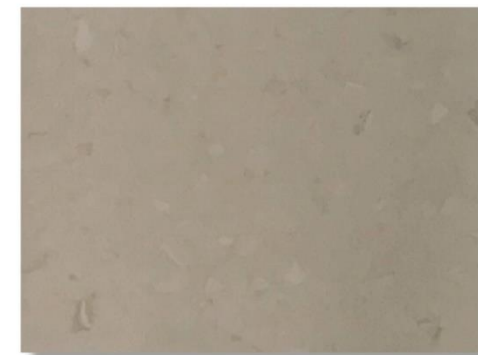


WL-18014

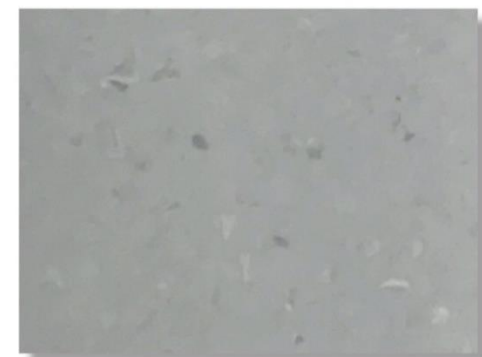

WL-18015

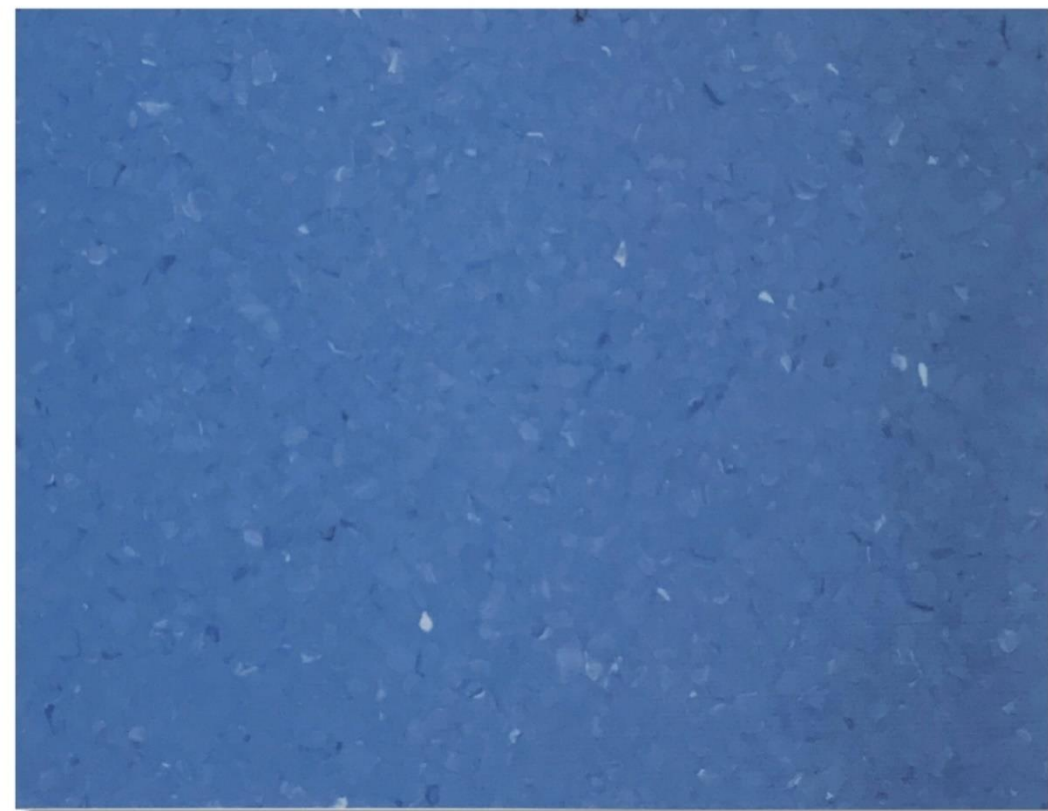


WL-18008

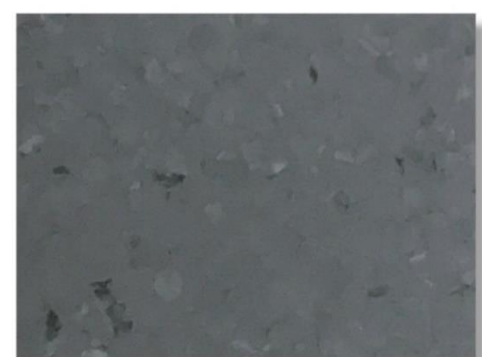


WL-18016

Size:2.0mm(T)x2.0m(W)x20m(L)

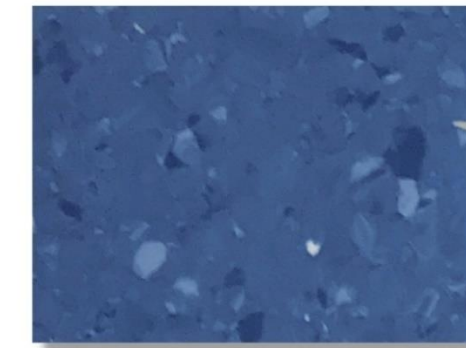


WL-1665

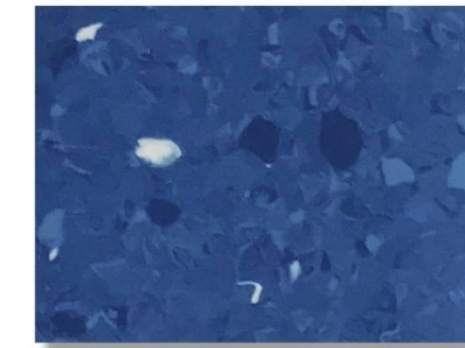


WL-1666



WL-1670

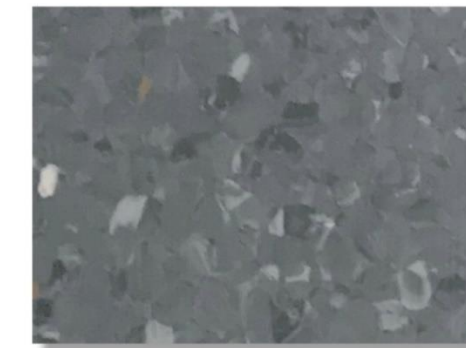

WL-1671

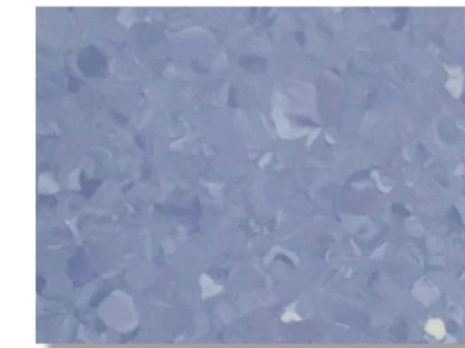

WL-1682



WL-1643




WL-1687



WL-1611



WL-1679

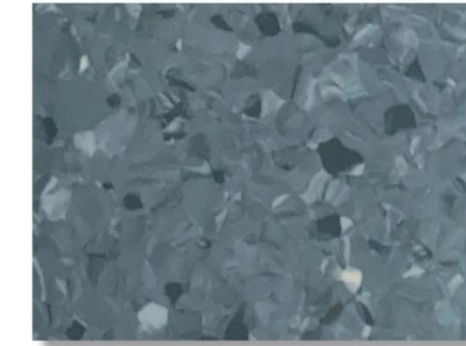


WL-1689



WL-1681



WL-1659

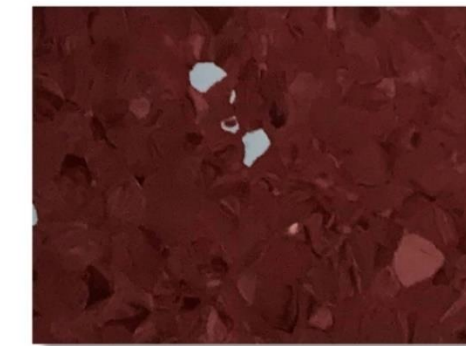

WL-1642



WL-1674




WL-1676


Victoria

Strengthen ployurethane homogeneous floor


Size:2.0mm(T)x2.0m(W)x20m(L)

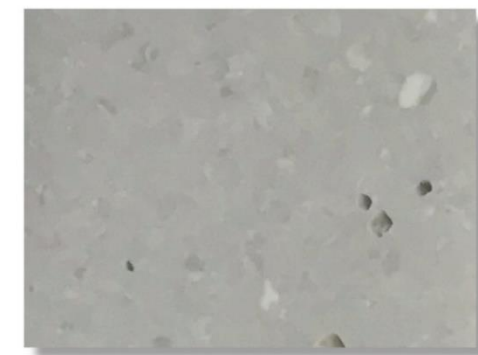

WL-26004

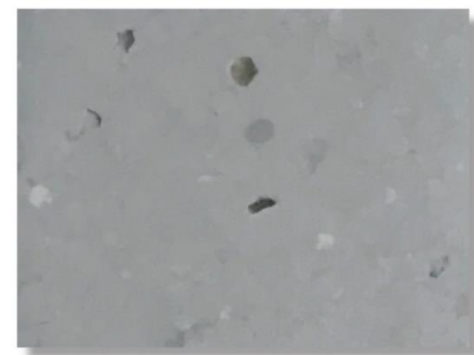


WL-26005

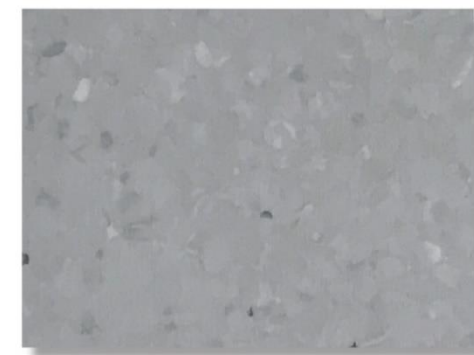


WL-26011




WL-26007

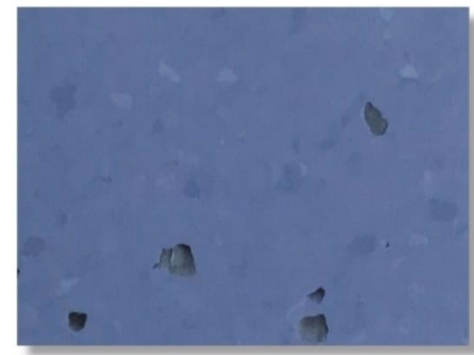


WL-26009

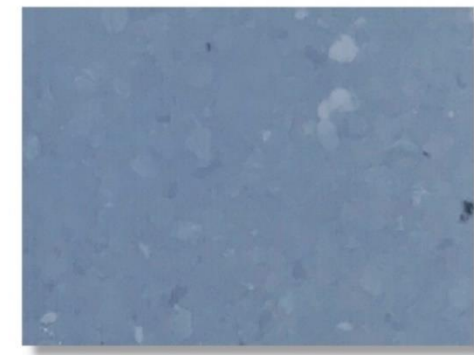


WL-26010

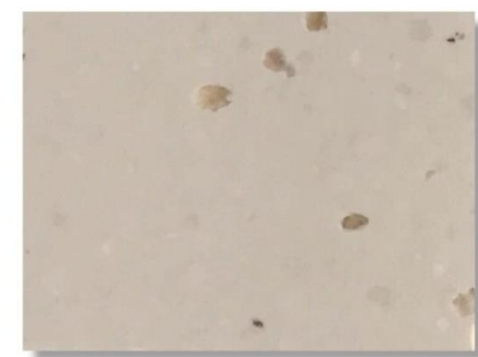


WL-26013

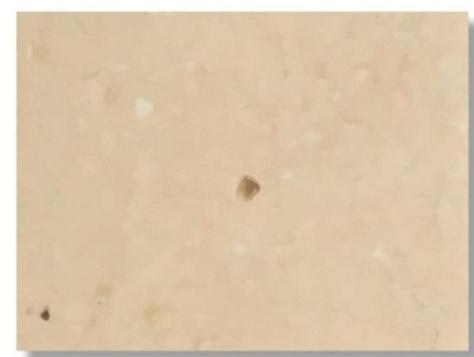


WL-26014

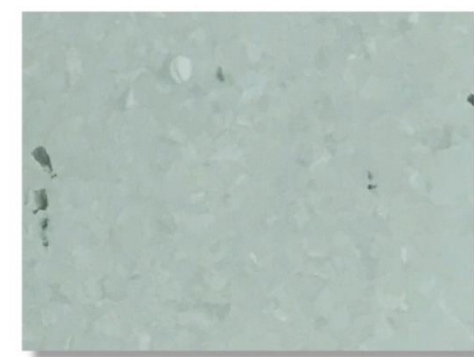

WL-26006

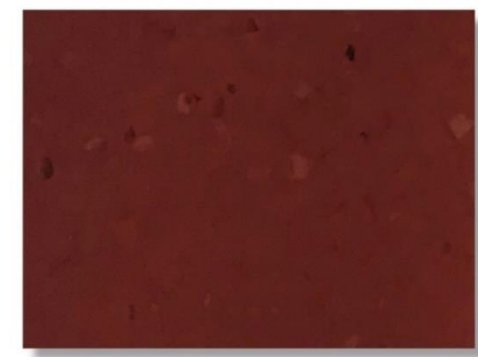

WL-26015

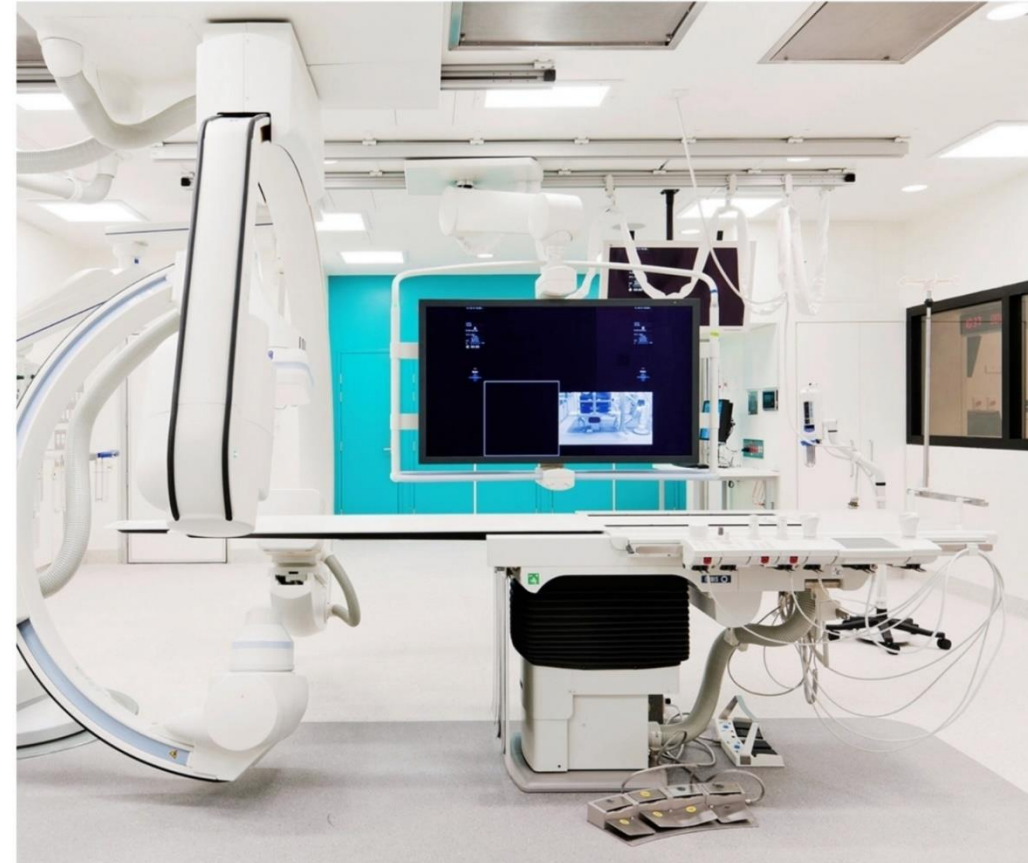

WL-26002

Huron

Strengthen ployurethane homogeneous floor

Size:2.0mm(T)x2.0m(W)x20m(L)




WL-2001




WL-2002



WL-2004

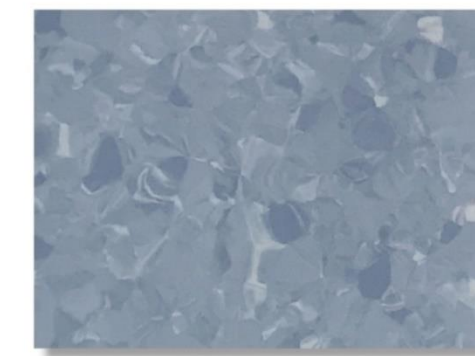

WL-2007

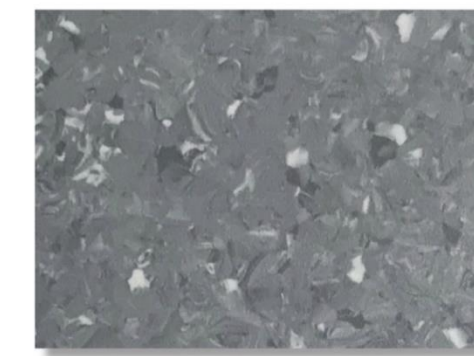


WL-2010



WL-2011




WL-2013

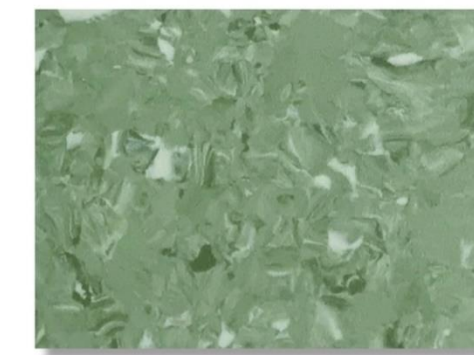


WL-2016




WL-2017

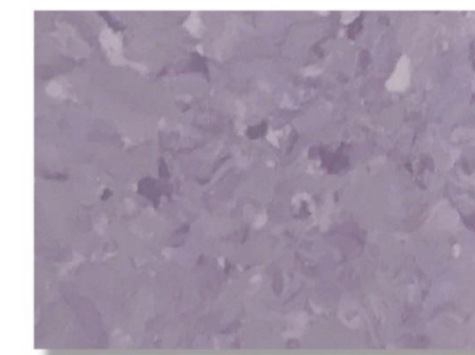


WL-2018

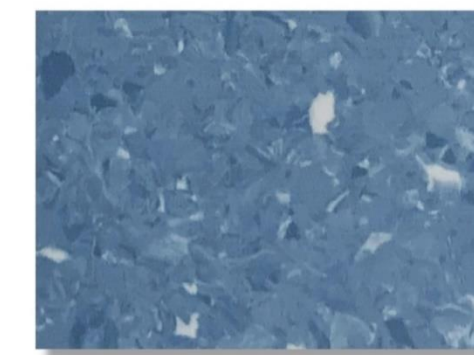

WL-2019

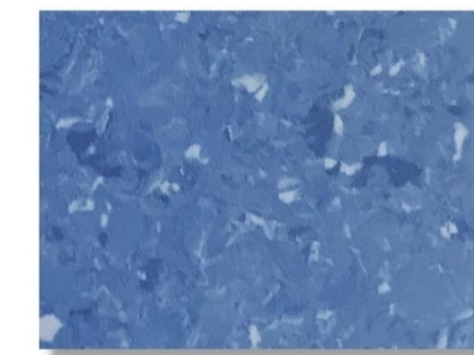


WL-2020

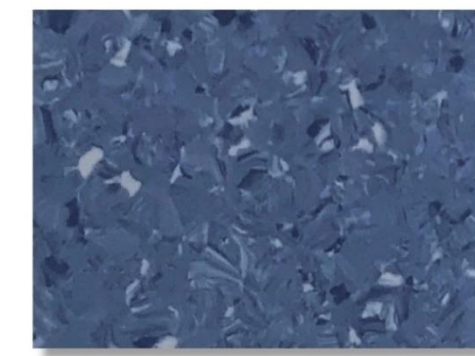

WL-2022



WL-2023

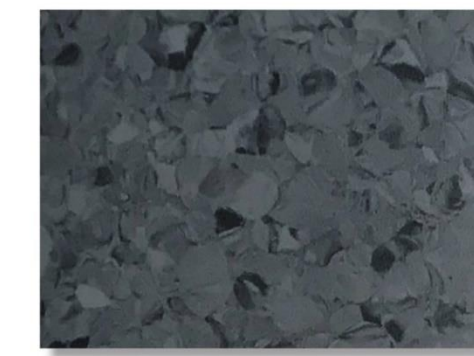

WL-2024

Michigan

Strengthen polyurethane homogeneous floor

Size: 2.0mm(T)x2.0m(W)x20m(L)



Malawi

Strengthen polyurethane homogeneous floor

Size: 2.0mm(T)x2.0m(W)x20m(L)




WL-1002



WL-1004




WL-1006

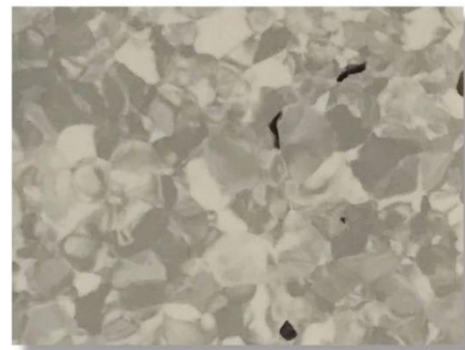


WL-1007




WL-1010

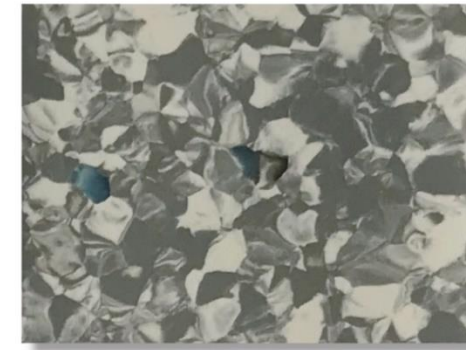

WL-1013

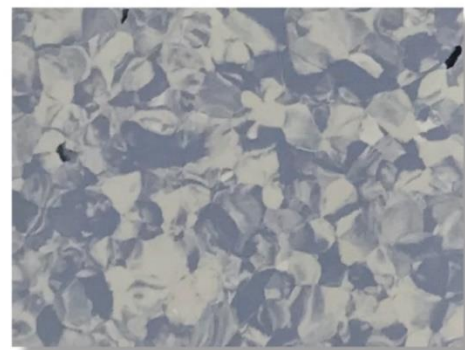


WL-1014

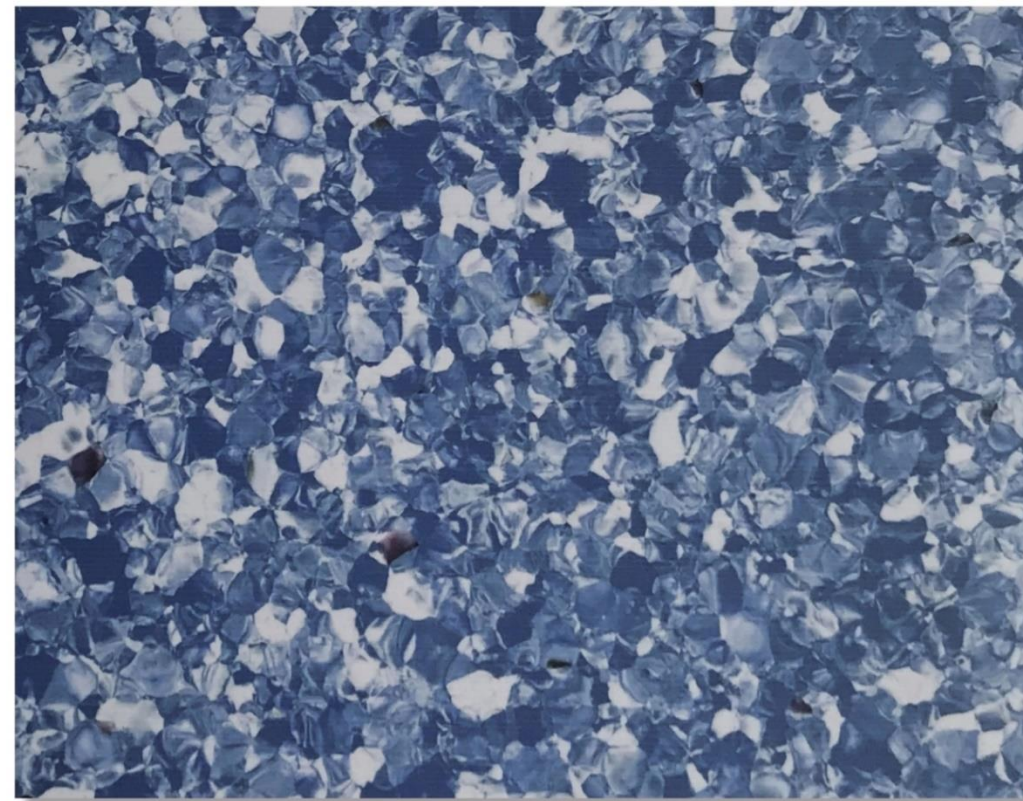

WL-1020



WL-1019

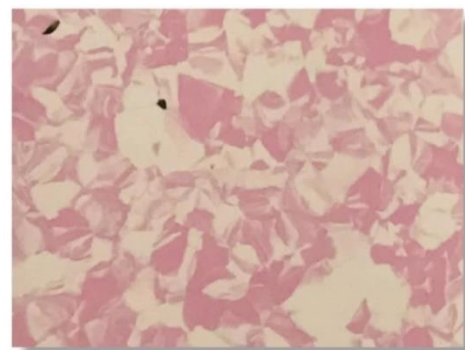


WL-1015




WL-1021



WL-1024

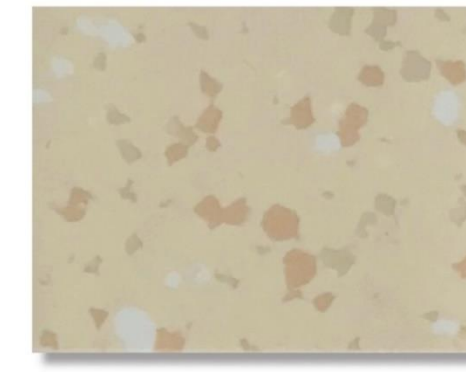


WL-A2001

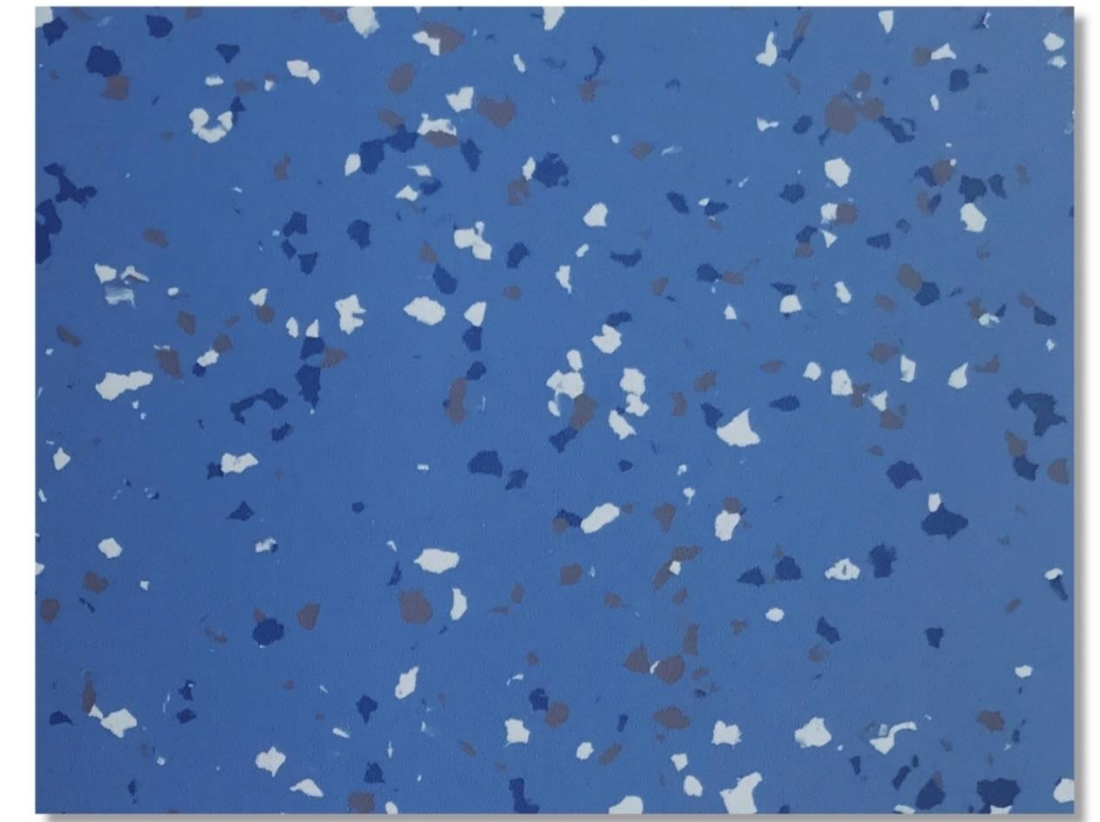

WL-A2013



WL-A2002

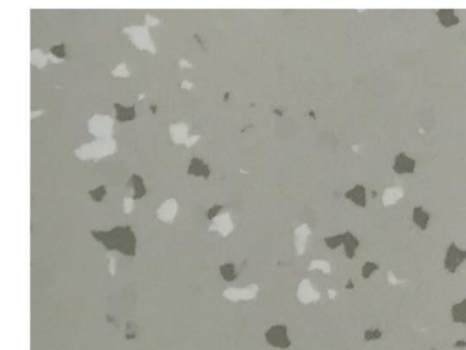


WL-A2005




WL-A2006




WL-A2009

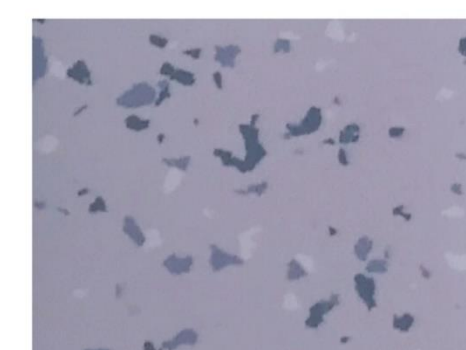


WL-A2010

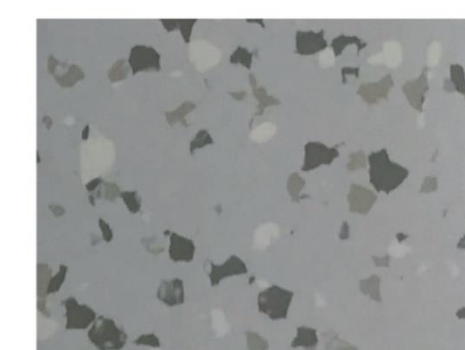


WL-A2011

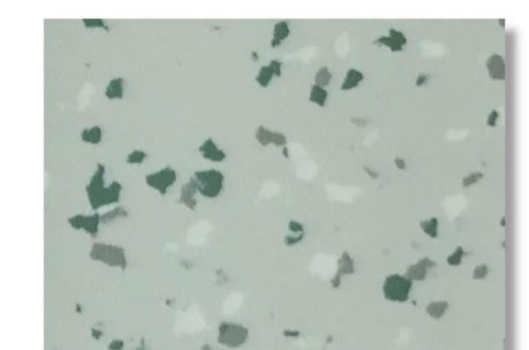


WL-A2015

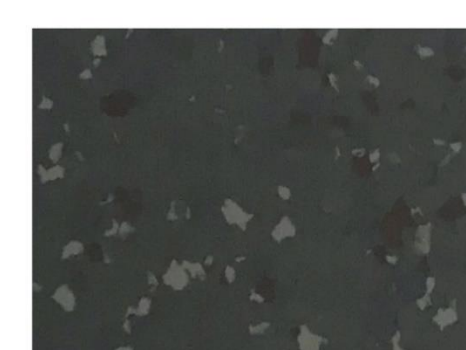

WL-A2018

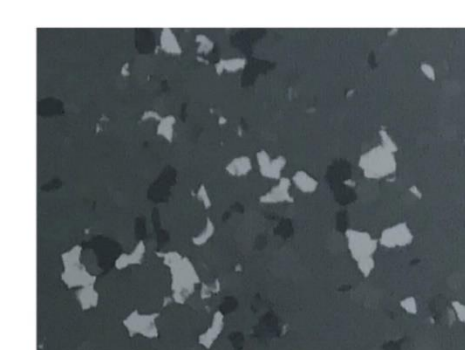

WL-A2019

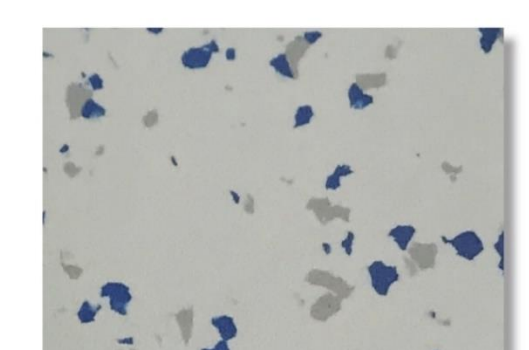


WL-A2033

Seine Strengthen polyurethane homogeneous floor

Size:2.0mm(T)x2.0m(W)x20m(L)



WL-D1001

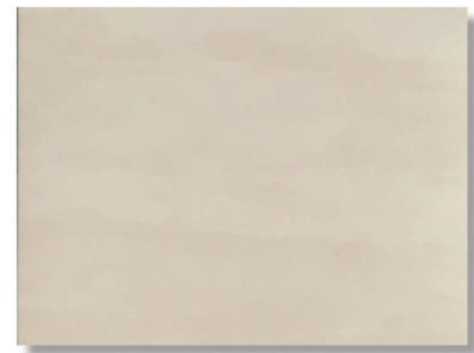

WL-D1002



WL-D1005



WL-D1007



WL-D1009



WL-D1011



WL-D1010



WL-D1012



WL-D1013



WL-D1006



WL-D1008



WL-D1021



WL-D1022



WL-D1019



WL-D1020

Moselle Strengthen polyurethane homogeneous floor

Size:2.0mm(T)x2.0m(W)x20m(L)



WL-B1101



WL-B1103



WL-B1106



WL-B1107



WL-B1112



WL-B1113



WL-B1116



WL-B1120



WL-B1123



WL-B1125



WL-B1126



WL-B1127



WL-B1128



WL-B1129



WL-B1130


Conductive Floor

ESD

Strengthen ployurethane homogeneous floor
Dimension:2.0mm(T)x2.0m(W)x20m(L)



Homogeneous Conductive PVC Roll Flooring

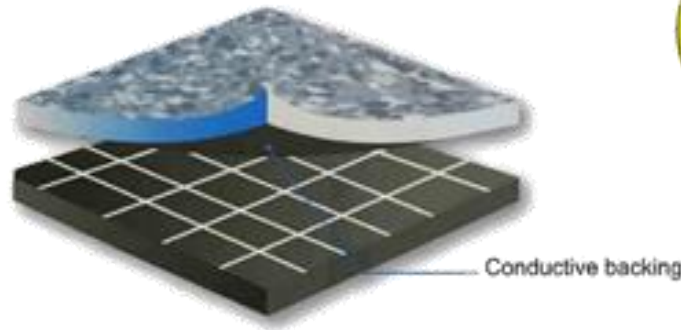

Products Property


Conductive PVC Roll Flooring, permanent conductive property. The products are widely used in the place of precise instrument and professional equipment, including electronics, clean room, computer room, hospital, telecommunication, airspace, etc.

Environmentally - Friendly Materials

Comply with ISO14001, using European advanced production technology, insure the raw materials and production meet European standard.





Durable

This product has excellent stability and wear resistance, meet the usage of all kind of public huge traffic site, durable, perfect stress resistance and wear resistance.

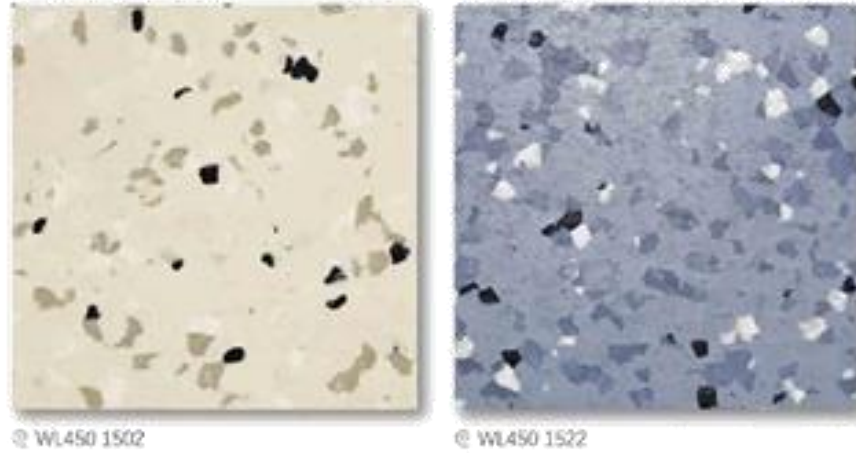

ESD

Strengthen ployurethane homogeneous floor
Dimension:2.0mm(T)x2.0m(W)x20m(L)

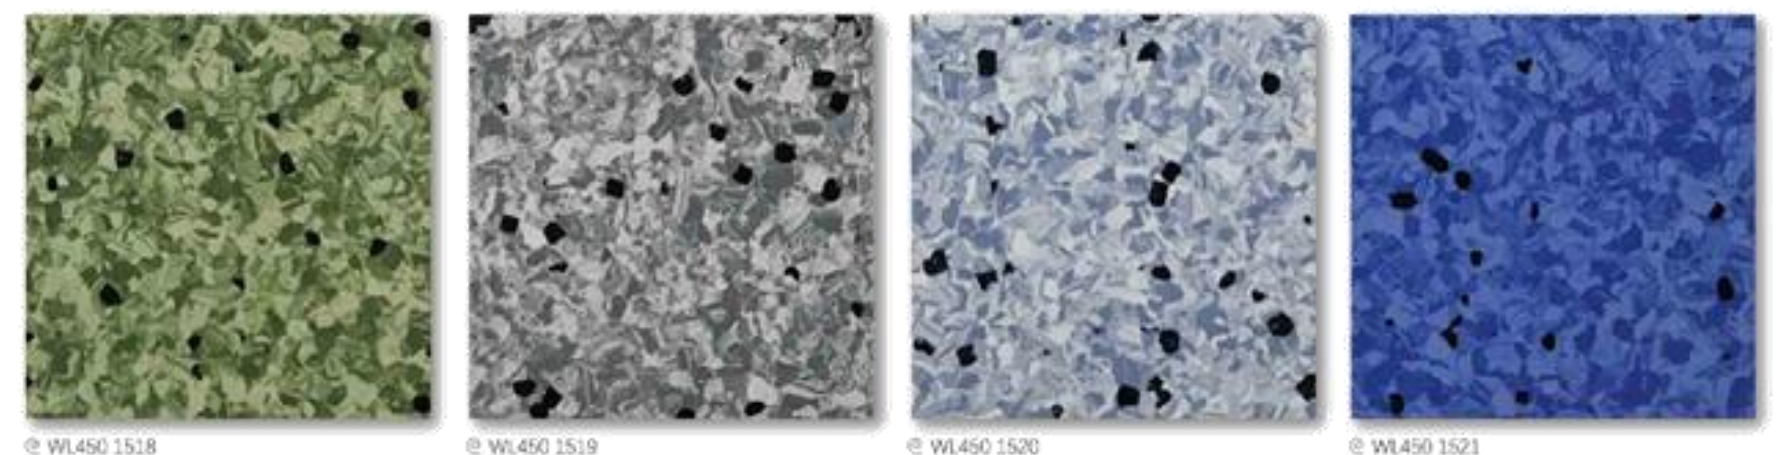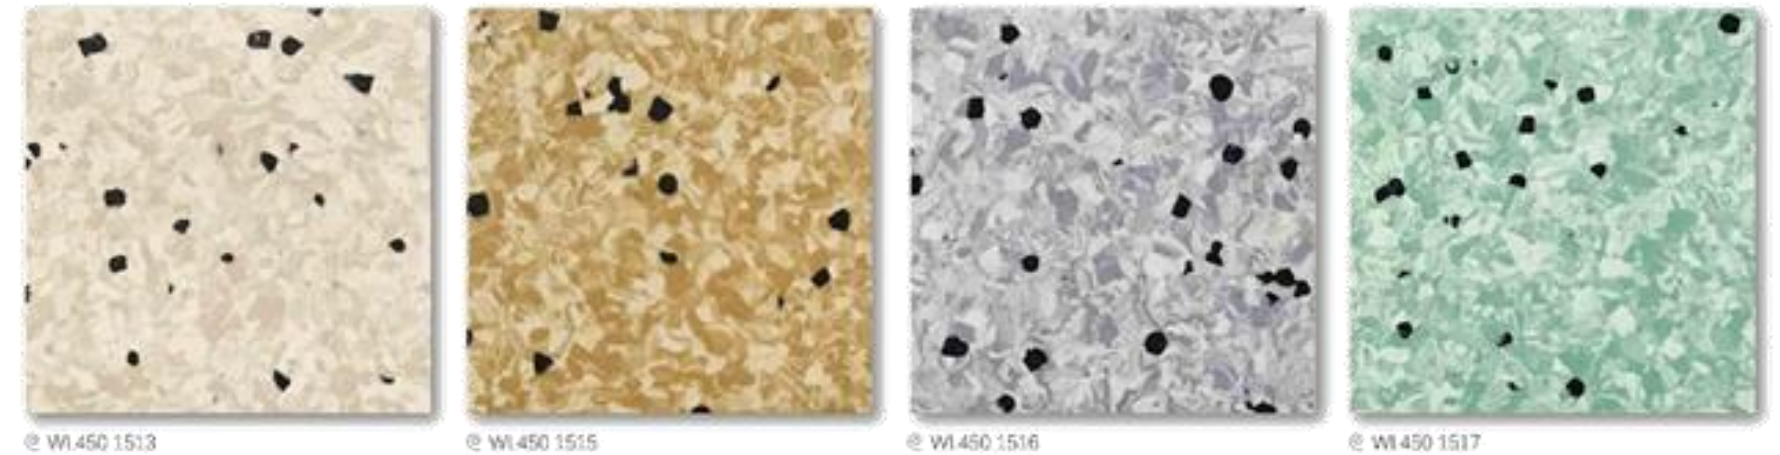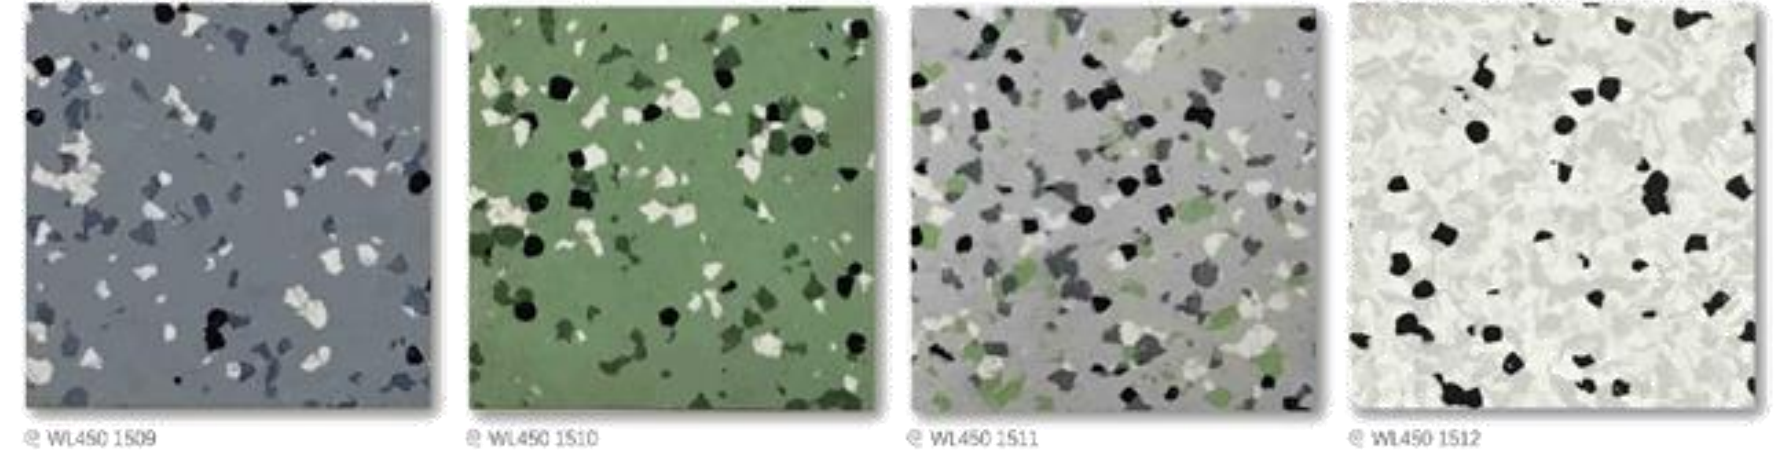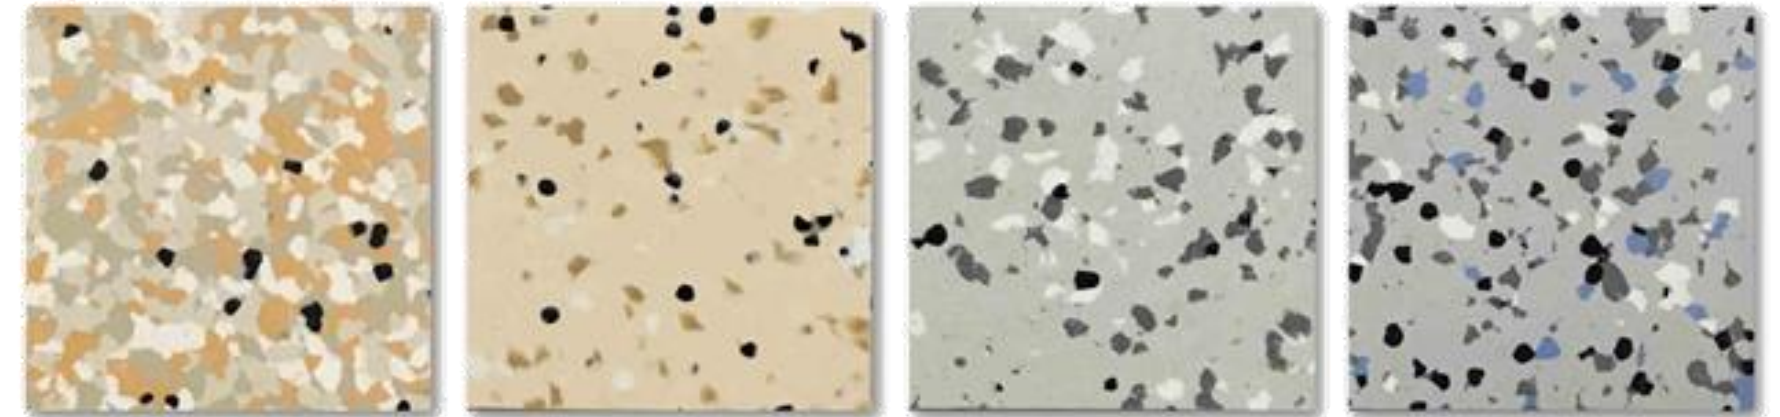


Anti-Static Floor


Danube

Strengthened polyurethane homogeneous floor

Size: 2.0mm(T)x2.0m(W)x20m(L)

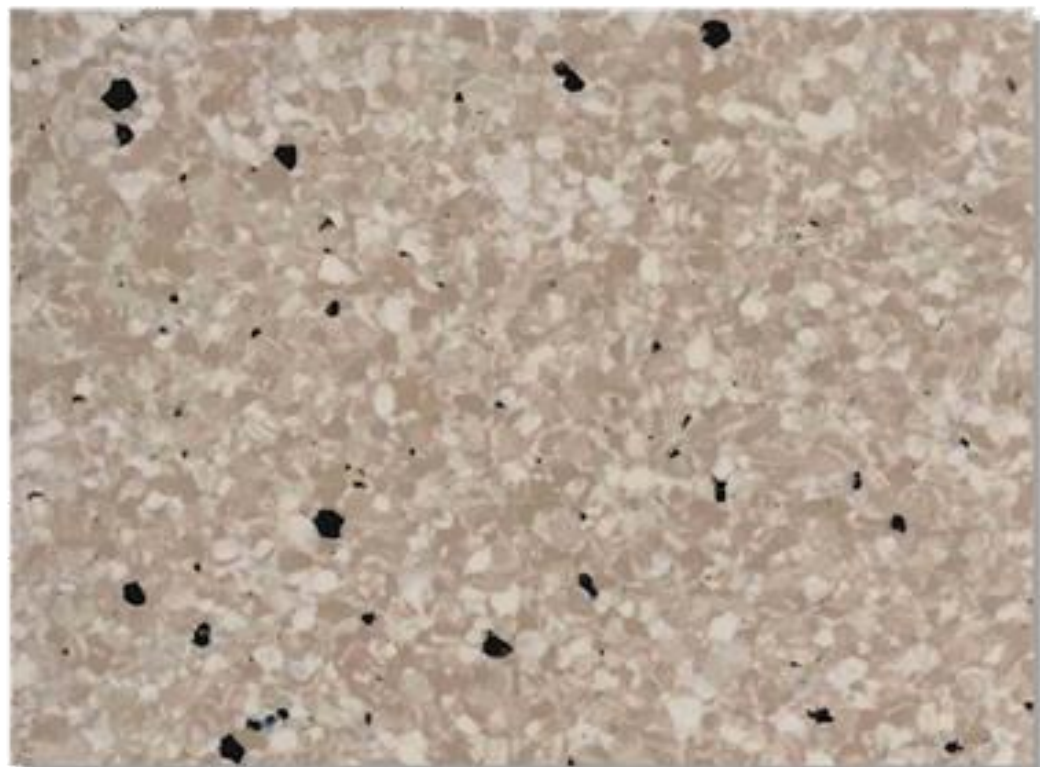


WL-19001

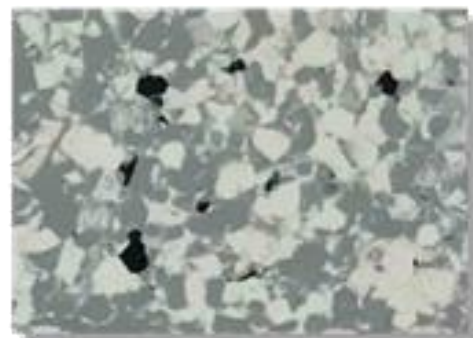


WL-19003




WL-19004

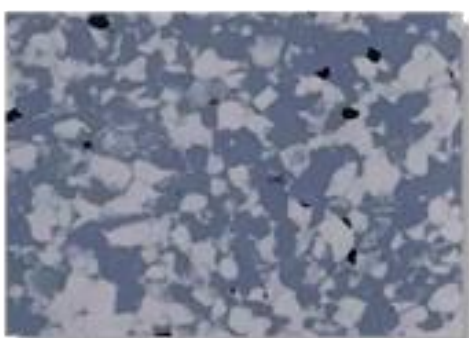

WL-19005

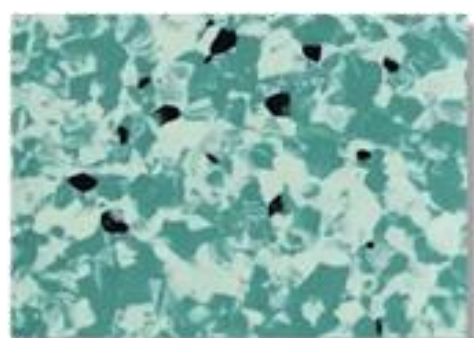

WL-19006

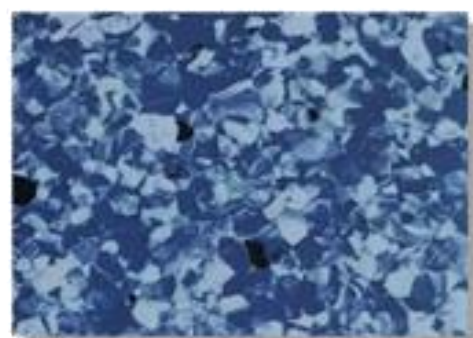

WL-19009



WL-19010



Factory Show



Hospital Projects

